
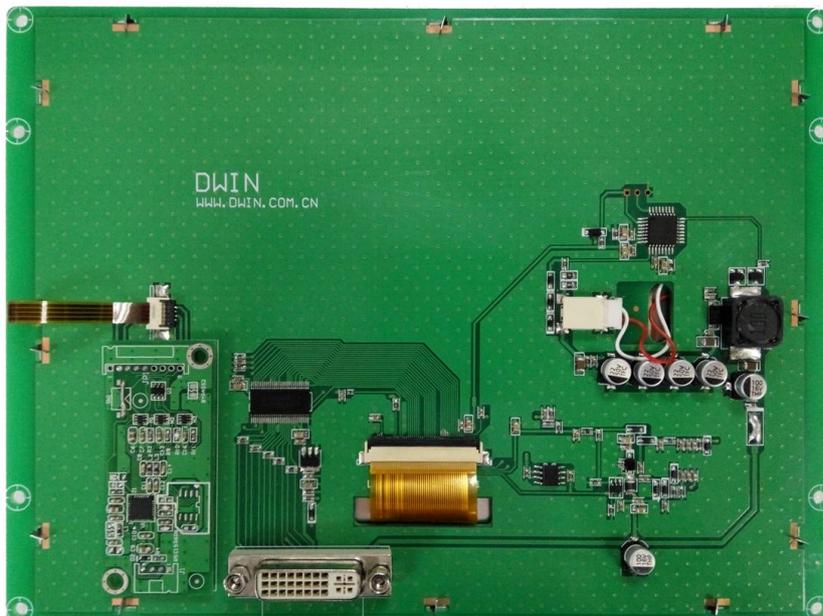


# HDW080\_001L

8.0-inch, 800\*600, 65K colors,

Resistive Touch, LVDS Multimedia Display, Anti-UV

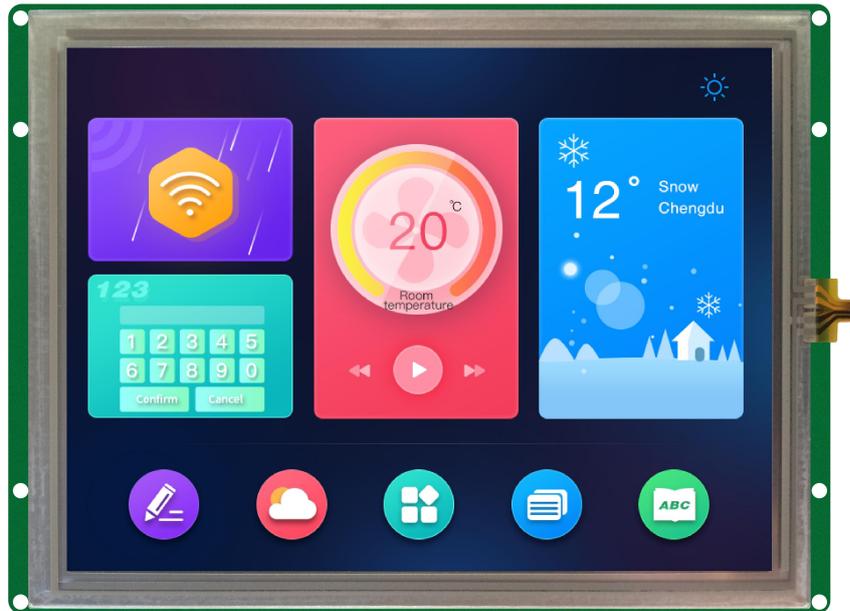

Disclaimer: The product design is subject to alternation and improvement without prior notice.

### ● Display Parameters

Item	Parameters	Description
Color	65K(65536)colors	16 bit color 5R6G5B
Active area (A.A.)	162.0 mm (W) × 121.5 mm (H)	800x600
Resolution	800x600	
Backlight	LED	-
Brightness	500nit	64 grade brightness adjustment (It's not recommended to set brightness to 1%~30% of
Note: You can use dynamic screen saver wallpapers to avoid afterimages caused by fixed page display for a long time.		

### ● Voltage & Current

Item	Conditions	Min	Typical	Max	Unit
Power voltage	-	-	5.0	-	V
Operating current	VCC = +5V, Backlight on	-	1000	-	mA
	VCC = +5V, Backlight off	-	140	-	mA
Recommended power supply: 5V 1A DC					

### ● Reliability Test

Item	Conditions	Min	Typical	Max	Unit
Operating temperature	60%RH at 5V voltage	-20	25	70	°C
Storage temperature	-	-30	25	85	°C
Operating humidity	25°C	10%	60%	90%	RH
Conformal coating	None				

### ● Peripheral

Peripheral	
Peripheral	Resistive touch screen(R4)


### ● Packaging & Dimensions

Dimension				
Dimension	199.40(mm)×148.9(mm)×25(mm)			
Net weight	450g			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
Carton1:	220mm(L)*160mm(W)*47mm (H)	-	-	-
Carton2:	250mm(L)*200mm(W)*80mm (H)	-	-	-
Carton3:	320mm(L)*270mm(W)*80mm (H)	2	1	2
Carton4:	450mm(L)*350mm(W)*300mm(H)	1	16	16
Carton5:	600mm(L)*450mm(W)*300mm(H)	1	30	30

## ● Interface Parameters


Item	Description
Interface mode	LVDS, the interface definition is shown in the dimension diagram (VDD=+5.0V)
User interface	DVI-I interface

DVI-I Interface

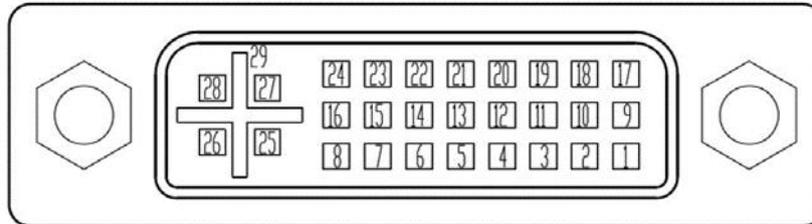

Pin	Name	Function	Description
1	RX2-	Input	-LVDS Differential data Input input
2	RX2+	Input	+ LVDS Differential data Input
3	GND	Power	GND
4	BL_PWM	Input	Backlight dimming control, PWM is used to adjust brightness output.
5	NC	-	NC
6	VDD	Power	5.0V Power Input
7	VDD	Power	5.0V Power Input
8	VDD	Power	5.0V Power Input
9	RX1-	Input	- LVDS Differential data Input
10	RX1+	Input	+LVDS Differential data Input
11	GND	Power	GND
12	RX3-	Input	-LVDS Differential data Input
13	RX3+	Input	+LVDS Differential data Input
14	VDD	Power	5.0V Power Input
15	GND	Power	GND
16	GND	Power	GND
17	RX0-	Input	- LVDS Differential data Input
18	RX0+	Input	+ LVDS Differential data Input
19	GND	Power	GND
20	USB_DM	I/O	USB D- signal
21	USB_DP	I/O	USB D+ signal
22	GND	Power	GND
23	RXCLK+	Input	Clock + LVDS Differential data Input
24	RXCLK-	Input	Clock - LVDS Differential data Input
25	VDD	Power	5.0V Power Input
26	VDD	Power	5.0V Power Input
27	NC	-	NC
28	NC	-	NC
29	GND	Power	GND

Interface Timing refers to the corresponding LCD Timing parameters. Please confirm the relevant LCD screen information with the DWIN salesperson.

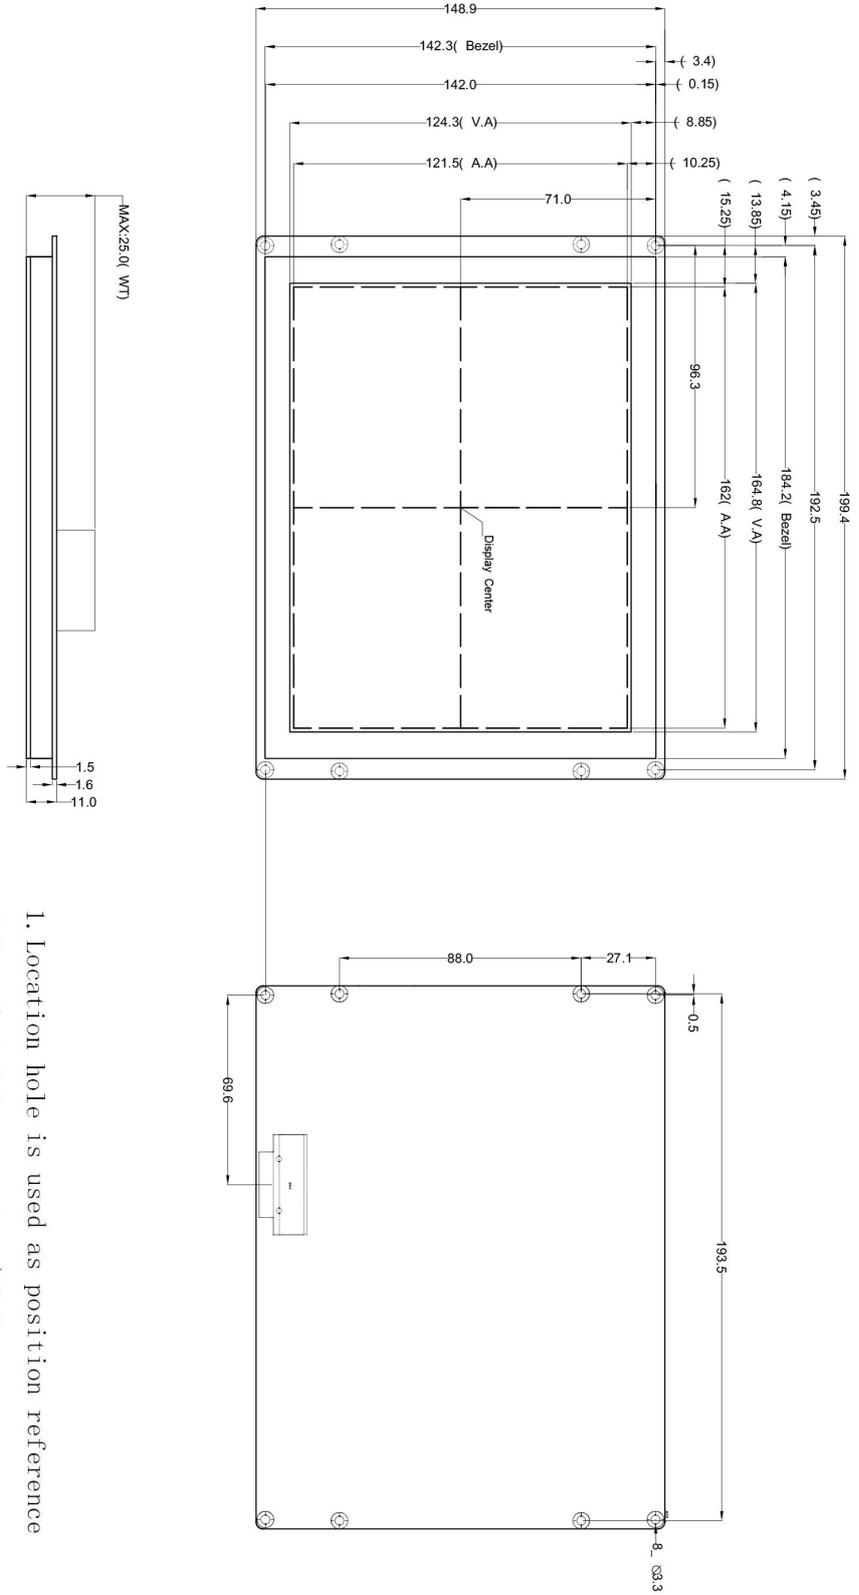

1. Location hole is used as position reference
2. Unmarked Tolerance is +/-0.3mm
3. Active area is marked in dashes.

Model	HDW080_001L			 Beijing DWIN Technology Co., Ltd.	
Drawing	A4	Drawn	DWIN		
Scale	1:1	Check		Data	
Unit	mm	Approval		Data	

## Revision Records

Version	Revise Date	Content	Editor
00	2023/7/27	First Edition	Kaya
01	2024/04/12	Add Important Disclaimer	YML

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

Customer service Tel: +86-400-018-9008

Customer service E-mail: [dwinhmi@dwin.com.cn](mailto:dwinhmi@dwin.com.cn)

Website: [www.dwin-global.com](http://www.dwin-global.com)

DWIN Developer Forum: <https://forums.dwin-global.com/index.php/forums>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

### Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.