



JPS DENTAL

Your Reliable Business
Partner in China

VIII



SINCE 2010

ONE STOP SOLUTION



WWW.JPSDENTAL.COM

Established in 2010, Shanghai JPS Medical Co., Ltd has been supplying dental products to customers from more than 80 countries and regions. Our main dental products are dental equipment such as dental simulation, chair-mounted dental unit, portable dental unit, oil free compressor, suction motor, X-ray machine and autoclave, etc. We supply dental disposables like implant kits, dental bibs, crepe paper, etc.

Our CE and ISO13485 were issued by TUV, Germany.

As a reliable and professional partner in China, JPS Medical is able to:

Provide you dental products with the concept of **ONE STOP SOLUTION** to save your time, guarantee quality, manage the stable supply and control the risks.

Focus on R & D to constantly bring you new and advanced products.

Share you more and more business opportunities and experience.

Choose right partner, do right business.

Dental Teaching and Lab Products

Dental Simulator	01-06
Dental Manikin	07
Teeth Model	08
Workstation	09-12

Dental Clinic Equipment

Chair Mounted Dental Unit	13-20
Portable Dental Products	21-22
Oil-free Compressor	23
Suction Motor	24
Cabinet	25
Mobile Cart	26
X-ray Unit	27
Imaging System	28
Autoclave	29
Small Equipment	30-33
Handpiece	34-36
Curing Light	37
Ultrasonic Scaler	38
Intraoral Camera	39
Spare Part	40-41
Lab Equipment	42-43

Dental Consumables

Dental Disposable	44-58
Dental Burs	59-67
Hartmetallfraser	68
Sinter-diamond & Acrylic Polisher	69
Brushes & Mounted Stone	70
Diamond Disc	71-72
Dental Instruments	73

Dental Teaching and Lab Products

SIMULATOR JPS-FT-III



Standard Specifications:

- Advanced II phantom head with shoulder
- LED operating lamp with sensor function
- Large instrument tray with control panel
- Rotatable assistant tray
- High-speed handpiece tubing 1 pc
- Low-speed handpiece tubing 1 pc
- 3-way syringe 2pcs
- Water cycling system
- Waste water bottle system
- Disc foot control
- Low suction system

Features:

- Specially ergonomic design complete simulated dental chair for pre-clinical students and dentists
- Four hands operation design meets the demand of assistant and doctors' practice
- Auto reset function makes the whole simulation improves the space cleanliness, also saves much space
- Phantom head can be compatible with different jaws to meet different teaching requirements
- Independent suction system and quick detachment of waste water bottle is much easier operation

SIMULATOR + WORKBENCH JPS-FT-IV



Standard Specifications:

- Advanced II phantom head with shoulder
- LED operating lamp with sensor function
- Large instrument tray with control panel
- Rotatable assistant tray
- High-speed handpiece tubing 1 pc
- Low-speed handpiece tubing 1 pc
- 3-way syringe 2pcs
- Water cycling system
- Waste water bottle system
- Disc foot control
- Low suction system
- Stainless steel workbench

Features:

- Specially ergonomic design complete simulated dental chair for pre-clinical students and dentists
- Four hands operation design meets the demand of assistant and doctors' practice
- Auto reset function makes the whole simulation improves the space cleanliness, also saves much space
- Phantom head can be compatible with different jaws to meet different teaching requirements
- Independent suction system and quick detachment of waste water bottle is much easier operation Stainless steel is more stable and provides enough space for students

Dental Simulator

Simulator for Teacher JPS-FT-V

Standard Specifications:

- Advanced II phantom head with shoulder
- Large instrument tray with control panel
- Rotatable assistant tray
- High-speed handpiece tubing 1 pc
- Low-speed handpiece tubing 1 pc
- 3-way syringe 2pcs
- Water cycling system
- Waste water bottle system
- Disc foot control
- Low suction system
- Stainless steel workbench
- 23.8 inch monitor
- Imported operating camera lamp with sensor function

Features:

- Specially ergonomic design complete simulated dental chair for pre-clinical students and dentists
- Four hands operation design meets the demand of assistant and doctors' practice
- Auto reset function makes the whole simulation improves the space cleanliness, also saves much space
- Phantom head can be compatible with different jaws to meet different teaching requirements
- Independent suction system and quick detachment of waste water bottle is much easier operation
- Imported HD camera light can clearly record and transmit the courses taught by teachers



Medical professional video collection system

- Image sensor 1/2.8" CMOS
- Lens 30Xg optical zoom
- Image resolution 1920*1080P
- Object distance (Min.) 600-800mm (tele end)
- Centre Intensity 3000-50000lux
- Color temperature 4000K/4500K/5000K
- C.R.I (Ra) 95
- Input voltage AC220V+10%@180W

Simulator JM 980

Standard Specifications:

- LED oral lamp 1pc
- Phantom head with body 1set
- Operation tray and assistant tray 1set
- High speed handpiece tube 1pc
- Low speed handpiece tube 1pc
- 3-way syringe 2pcs
- Saliva ejector 1pc
- Clean and waste water system 1set
- Built-in compressor 550w, air tank 4L 1set
- Foot control 1pc
- Main box with marble tabletop and wheels 1set
- Storage cabinet with two side doors 180x300x350cm

Features:

- Plug and play simulator
- The minimum lifting height is 450mm
- The maximum lifting height is 750mm
- The pitch is -5 ° to 90 °
- Pneumatic locking
- One button control of the entire equipment for water, air, electricity, and pneumatic locking



Dental Simulator

Simulator JM 880

Standard Specifications:

- LED operation light with sensor 1set
- Main cabinet with two drawers
- Nissin type phantom head with shoulder 1set
- Teeth model 1set
- Main operation tray and assistant control
- 2 memory positions
- High-speed handpiece tube 1pc
- Low-speed handpiece tube 1pc
- 3-way syringe 2pcs
- Low suction 1pc
- Built-in pure water bottle 1pc
- Waste water bottle 1pc
- Multifunctional foot control 1pc
- Dentist stool 1pc

Features:

- Silicone face can add drainage pipes, with an opening of $\geq 5\text{cm}$
- Teeth mold with silicone soft gums, detachable teeth
- Metal painting for the main cabinet



Simulator JM 380

Standard Specifications:

- Cold shadowless operating light 1pc
- Simulated dental chair assembly 1set
- Phantom head with shoulder 1set
- Forward and backup movement 1set
- Operation tray and assistant rack 1set
- Handpiece tube 2pcs
- 3-way syringe 1pc
- Water filtration system 1set
- Waste collection system 1set
- Saliva ejector 1pc
- Multi-function foot control 1pc
- Dental stool 1pc

Features:

- The minimum distance from the ground is 550mm
- The maximum distance from the ground is 1300mm
- Pitch angle -5 degrees to 90 degrees
- With safety locking system



Dental Simulator

Simulator JPSD-E180

Standard Specifications:

- LED light with sensor 1pc
- Phantom head with shoulder 1set
- Instrument holder 1set
- High-speed handpiece tube 1pc
- Low-speed handpiece tube 1pc
- 3-way syringe 1pc
- Suction system 1set
- Clean water system or tap water system
- Foot control 1pc
- Three hole sockets 2sets
- Dentist stool 1pc
- Workstation 1set

Features:

- Simple manual simulation. High end simulation head mold manually realizes left and right rotation and pitch motion, making operation easy and free
- Simulation shoulder: can be stored under the table
- Manual adjustment: height, rotation



Twin Simulator ED 280

Standard Specifications:

- LED light 2 sets
- Nissin type phantom, silicon mask 2 sets
- Teeth model with silicon soft gums, teeth 2 sets
- High speed handpiece 2 pcs
- Low speed handpiece 2 pcs
- 3-way syringe 4 pcs
- Dentist stool 2 sets
- Built-in clean water system 2 sets
- Waste water system 2 sets
- Low suction system 2 sets
- Foot control 2 pcs
- Workstation 1200*700*800mm

Features:

- For four students use, saving space
- Facemask mouth opening degree $\geq 5\text{cm}$
- Teeth are replaceable



Dental Manikin

Simple Manikin II

Standard Specifications:

- Simple economic phantom
- Head cover
- Teeth model
- Rubber face
- Torso with bench mounted screw
- The height of upper and lower openings is more accurate, 0-50mm
- Overall lifting height 0-70mm

Features:

- It is used to simulate oral teaching and practical training, with extensive use of lightweight internship system
- Compact and lightweight economy type simulator can be attached to most desks using the supplied
- Bench mount a screw located in the head base is used to fix the upper and lower jaw models
- Easy screw-on type design



Advanced Type II

Standard Specifications:

- Advanced phantom
- Head cover
- Teeth model
- Rubber face
- Torso with bench mounted screw

Features:

- High grade simulator with various occlusal and jaw movement functions for advanced pre-clinical students
- Face-bow training is possible
- Easy-to-use magnet change system
- It can simulate actual human patient's open position
- Jaw is adjusted to 0-50mm open position



Chair Mount Torso with Type II Advanced

Standard Specifications:

- Advanced phantom with belt
- Phantom head
- Teeth model
- Rubber face

Features:

- It is used to simulate oral teaching and practical training, senior head of fixed dental chair is a dental mold fixture with analog devices
- Head mold can be a variety of jaw movements, jaw frame with magnet device to facilitate disassembly dental mold the bottom body with shoulder-mounted positioning tighten, convenient shoulder body head mold in the dental chair and disassembly, this device can simulate many areas of dental treatment while durable in use



Teeth Model

Standard Teeth Model

Universal model for realistic exercises in preventive, conservative and prosthetic dentistry, prosthodontia emphasizing functional occlusion

Code	Model Category	Imitate Type	Mounting System	Dentition Type	Applicable National
JPS-DM-001	Standard	NISSIM: N200	FE	28	Asia
JPS-DM-002	Standard	NISSIM: N200	FE	32	European
JPS-DM-003	Standard	NISSIM: N200	DP	28	Asia
JPS-DM-004	Standard	NISSIM: N200	DP	32	European
JPS-DM-005	Standard	NISSIM: N500	FE	28	Asia
JPS-DM-006	Standard	NISSIM: N500	FE	32	European
JPS-DM-007	Standard	NISSIM: N500	DP	28	Asia
JPS-DM-008	Standard	NISSIM: N500	DP	32	European
JPS-DM-009	Standard	Frasco: ANA-4	DP	28	Asia
JPS-DM-010	Standard	Frasco: ANA-4	DP	32	European
JPS-DM-011	Standard	Frasco: AG-3	DP	28	Asia
JPS-DM-012	Standard	Frasco: AG-3	DP	32	European



Pedodontic Model

Exhibition of children's dentition development in different ages (Especially for 3-7-9 year-old) and display the primary and permanent alternate (20teeth + FE articulator).



Periodontal Disease Model

The model used for periodontal disease, alveolar and gum shows disease state. The first molar was fitted with a furcation tooth, mainly used in supragingival scaling, subgingival scaling gingival resection.



Extraction Anesthesia Model

The model can be used in Nissin Senior type I and II type Manikin for local anesthesia training including mandibula. 11 anesthetic contact sensor points, 7 in the upper jaw and 4 in the lower jaw. Battery-powered audio signal and light signal indicates when correct position and angle injection is achieved. Audio signal can be turned off for testing and evaluation purposes.



Extraction Model

The special model for oral medical qualification examination, there are 12 teeth can be pulled out.



Implant Practice Model

The alveolar bone part on the model which is used for planting practice has compact bone and cancellous bone structure, wider bone width allows you to do basic implant techniques, replaceable implant socket feature allows you to practice repeatedly opposing upper jaw enables you to consider drilling and implant insertion direction and angle in relationship to the opposing dentition. Procedures up to the final restoration are possible.



Workstation

JM-JY-52L / 52M / 52S / 52W (1.0m)

Standard Specifications:

- Shadowless lamp*1
- Aluminum alloy shelf assembly*1
- Air gun*1
- Multi-media outlet*1
- Ancon adjustable*1pair
- Dust collection assembly (with tempering sector glass dust board)*1
- Dust collector*1
- Desktop standard: *B: compact laminate desktop (JW-52L)x1
- Dimensions: 100*60*80-85cm (adjustable)
- Packing size:108×58×76cm
- Weight: 90kg
- Assistant marble collection(JW-52M)x1
- Stainless steel desktop (JW-52S)x1
- Oak solid wooden desktop (JW-52W)x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



JW-53L / 53M / 53S / 53W (1.2m)

Standard Specifications:

- 8606A: 5inches 500 angles magnifying glass lamp*1
- Aluminum alloy shelf assembly*1
- Air gun*1
- Ancon adjustable*1
- Dust collection assembly (with tempering sector glass dust board)*1
- Dust collector*1
- Desktop standard: *B: compact laminate desktop (JW-53L)x1
- Dimensions: 120*60*80-85cm (adjustable)
- Packing size:128×58×76cm
- Weight: 90kg
- Artificial Marble desktop (JW-53M)x1
- Stainless Steel desktop (JW-53S)x1
- Oak Solid Wooden desktop (JW-53W)x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



Workstation

JW-53L / 53M / 53S / 53W (1.2m)

Standard Specifications:

- 8606A: 5 Inches 500 angles magnifying glass lamp *1
- Steel shelf assembly *1
- Air gun *1
- Ancon can be adjusted *1
- Dust collection assembly (with tempering sector glass dust board) *1
- Dust collector *1
- Desktop standard: *B: compact laminate desktop (JW-53L)x1
- Dimensions: 120*60*80-85cm (adjustable)
- Packing size: 128*58*76cm
- Weight:100kg
- Assistant marble collection(JW-53M)x1
- Stainless steel desktop (JW-53S)x1
- Oak solid wooden desktop (JW-53W)x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



JW-54B / 54M / 54S / 54W (1.4m)

Standard Specifications:

- 8606A: 5 Inches 500 angles magnifying glass lamp *1
- Aluminum alloy shelf assembly *1
- Air gun *1
- Multi-media outlet *1
- Ancon can be adjusted *1
- Dust collection assembly (with tempering sector glass dust board) *1
- Dust collector *1
- Reusable box *1
- Desktop standard: *B: compact laminate desktop (JW-54L)x1
- Dimensions: 140*60*80-85cm (adjustable)
- Packing size: 148*58*76cm
- Weight:130kg
- Assistant marble collection(JW-54M)x1
- Stainless steel desktop (JW-54S)x1
- Oak solid wooden desktop (JW-54W)x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



Workstation

JW-55L / 55M / 55S / 55W (1.6m)

Standard Specifications:

- 8606A: 5 inches 500 angles magnifying glass lamp*2
- Aluminum alloy shelf assembly*1
- Aluminum alloy frame assembly*1
- Air gun*2
- Ancon adjustable*2
- Dust collection assembly (with tempering sector glass dust board)*2
- Dust collector*2
- Desktop standard: compact laminate desktop (JW-55L)x1
- Dimensions: 160*60*80-85cm (adjustable)
- Packing size: 168*58*76cm
- Weight: 110kg
- Assistant marble collection(JW-55M)x1
- Stainless steel desktop (JW-55S)x1
- Oak solid wooden desktop (JW-55W)x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



JW-56L / 56M / 56S / 56W (1.8m)

Standard Specifications:

- Type of sun lighting: 5inches 500 angles magnifying glass lamp*2
- Aluminum alloy shelf assembly*1
- Aluminum alloy frame assembly*1
- Air gun*2
- Ancon adjustable*2
- Dust collection assembly (with tempering sector glass dust board)*2
- Dust collector*2
- Desktop standard: compact laminate desktop (JW-56L)x1
- Dimensions: 180*60*80-85cm (adjustable)
- Packing size: 188*65*77cm
- Weight: 140kg
- Assistant marble collection(JW-56M) x1
- Stainless steel desktop (JW-56S) x1
- Oak solid wooden desktop (JW-56W) x1

Features:

- Aluminum alloy frame and shelf are more stable and durable
- Triangular table feet with base balancing adjustable are more stable
- Built-in pipeline and built-in dust collector
- The European Union CE certification
- ISO9001-2000 quality management system certification



Aluminum alloy shelf assembly

Stainless steel shield

Hand guard layer board

Work surface

Tempering sector glass dust board

Electrical outlet and cord hole

Dust collection assembly

Back shroud

Top drawer

Lower drawer

Materials plate

Dust collector

Tube

Table frame interior cover

Cast aluminum table bases

Built-in all kinds of pipeline

Table bases balancing adjustment



Dental Clinic Equipment

Chair Mounted Dental Unit

JPS F600

Standard Specifications:

- Electric motor driven patient chair
- Operation tray and assistant tray with high temperature sterilizable silicone pad
- Four holes high speed handpiece and electric motor low speed handpiece
- 3-way syringe (with cold and hot water)
- High suction / low suction
- Imported LED oral lamp
- Detachable ceramic spittoon
- Built-in central negative pressure suction system
- Built-in automatic pipeline disinfection and cleaning system
- Automatic heating constant temperature water supply system
- Multi-function foot control
- Distilled water supply system
- Dentist stool: F601

Features:

- Aluminum backrest is more stable
- The side box can be rotated to provide more operating space for assistants
- Imported tube disinfection system with good corrosion resistance keeps tube clean and sanitary
- Each holder can be set according to the working habits of the doctors
- Handpiece can be set to work automatically without controlled by foot control
- Equipped with alarm to free up more time for the doctors
- Linkage function between chair and LED light improves the effective of operation



JPS F700

Standard Specifications:

- Electric motor driven patient chair
- Operation tray with high temperature sterilizable silicone pad
- Four holes high speed handpiece
- Low speed handpiece
- 3-way syringe (with cold and hot water)
- Assistant tray with high suction / low suction
- Imported LED oral lamp
- Detachable ceramic spittoon
- Built-in central negative pressure suction system
- Automatic heating constant temperature water supply system
- Multi-function foot control
- Distilled water supply system
- Dentist stool: F601

Features:

- Imported low-voltage silent motor is adopted to make the seat run smoothly
- The side box can be rotated to provide more operating space for assistants
- Aluminum backrest is more stable
- Integrated touch screen with waterproof design is convenient for operation
- The saliva suction delay function prevents sewage from remaining in the saliva suction pipeline
- Linkage function between chair and LED light improves the effective of operation
- Hydraulic driven is optional
- 15° rotatable patient chair is optional



Chair Mounted Dental Unit

JPS M80

Standard Specifications:

- Electric motor driven implant patient chair
- Double joint headrest
- Movable stainless operation tray with silicone protective cover
- LED film viewer
- Stainless instrument tray 2pcs
- Stainless steel mobile cart
- Four pre-set memory positions
- High & low speed handpiece hose
- 3-way syringe
- Shadowless implant LED operating lamp with sensor
- Clean water system
- Assistant tray with touchpad
- High suction & saliva ejector
- 90° turnable and detachable cuspidor for disinfection
- Multifunction foot control
- Dentist stool: SY001

Features:

- Trendelenburg position
- 2 sets of stainless steel instrument trays are convenient for placing instruments during planting
- The mobile trolley design is convenient for the nurse to operate the chair
- Emergency stopping security system



JPS M70 PLUS

Standard Specifications:

- Deluxe LED operation lamp with sensor
- Electric motor driven aluminum base dental chair
- Double joint headrest
- Aluminum backrest and removable armrests
- Instrument tray with LCD screen touchpad
- 4 Pre-memory positions
- Stainless steel tray
- High & low speed handpiece hose
- 3-way syringe
- Air & water suction
- Assistant tray with touchpad
- High suction & saliva ejector
- 180° ceramic rotatable spittoon
- Clean water system
- Memory setting foot control
- Dentist stool: S8501

Features:

- All tubings are made in USA
- Aluminum base and backrest make the chair more stable
- The low position of the spittoon and the seat is more convenient for the children
- Trendelenburg position
- Emergency stopping security system
- Security lock system for the handpiece
- Stainless instrument tray
- Anti-retraction valves to prevent cross contamination system
- Radius system
- Flush system



Chair Mounted Dental Unit

JPS M70

Standard Specifications:

- Electric motor driven aluminum base dental chair
- LED operation lamp with sensor
- Double joint headrest
- Aluminum backrest and removable armrests
- Control panels on both dentist and assistant sides
- Film viewer and stainless steel tray
- 4 Pre-memory positions
- High & low speed handpiece hose
- 3-way syringe
- Air & water suction & clean water system
- High suction & saliva ejector
- 180° ceramic rotatable spittoon
- Timing up cup water supplier and spittoon clean system
- Multifunction foot control
- Dentist stool: S8501

Features:

- All tubings are made in USA
- Trendelenburg position
- Emergency stopping security system
- Security lock system for the handpiece
- Anti-retraction valves to prevent cross contamination system
- Radius system
- Flush system
- Synchronous function of backrest & seat



JPS M70A

Standard Specifications:

- Electric motor driven aluminum base dental chair
- Double joint headrest
- Aluminum backrest and removable armrests
- Over-pull type delivery with touchpad
- Film viewer
- Four preset positions
- Stainless steel tray
- Three handpiece automatic control
- 3-way syringe with tubing
- Shadow-less LED operating light with sensor
- Assistant tray with touchpad
- High suction & saliva ejector
- Clean water system
- Multifunction foot pedal
- Dentist stool: S8501

Features:

- American style dental chair
- Aluminum base and backrest make the chair more stable
- Trendelenburg position
- Emergency stopping security system
- Security lock system for the handpiece
- Anti-retraction valves to prevent cross contamination system
- Radius system
- Synchronous function of backrest & seat movement



Chair Mounted Dental Unit


JPS X60

Standard Specifications:

- Electric motor driving dental chair
- Double joint headrest
- Metal cast aluminum backrest
- Instrument table with touch screen
- Multifunctional assistant control box with touch button
- Stainless steel instrument tray
- Three memory programmes
- High suction & saliva ejector
- 3-way syringe with tubing
- Patent unique inductive 8 holes LED lamp
- 90° rotatable side box
- 90° rotatable spittoon is detachable for easy disinfection
- Built-out filter cup and tissue box and cup holder
- Clean water system
- Multifunction foot control
- Dentist stool: X6001

Features:

- Disinfection system is optional
- Top mounted type instrument table is optional
- The side box connector can be rotated toward the front of the chair, which is convenient for entering the door
- Injection molding plastic cover, beautiful and durable
- Imported USA hydrolytic resistance water/air tube
- Durable Taiwan imported handpiece tube



JPS M30

Standard Specifications:

- Electric motor driving dental chair
- Floor-type side box
- Double joint headrest
- Metal cast aluminum backrest and removable armrests
- Injection molding & large instrument tray
- Three memory programmes
- High suction & saliva ejector
- 3-way syringe with tubing
- Patent unique inductive 6 holes LED lamp
- 90° rotatable spittoon is detachable for easy disinfection
- Clean water system
- Multifunction foot control
- Dentist stool: X6001

Features:

- Metal cast aluminum backrest with onetime stamping molding technology, improve the sturdiness and reliability of entire unit
- Lamp & chair linkage improve the doctor's working efficiency
- The spittoon automatically flushes for 10 seconds
- Durable Taiwan imported handpiece tube



Chair Mounted Dental Unit

JPS E30

Standard Specifications:

- Electric motor driven steel base dental chair
- LED operating light with sensor
- Double joint headrest and removable armrests
- Over-pull type instrument tray and assistant tray with touchpad
- Four pre-set memory positions
- 24V film viewer
- High & low speed handpiece tubing
- 3-way syringe
- High suction & saliva ejector
- Ceramic spittoon and cup-filler & bowl rinse
- Timing up cup water supplier and spittoon clean system
- Clean water system
- Double water bottle (600ml+1000ml)
- Multi-function foot control
- Dentist stool: S8503

Features:

- European- style dental unit
- All handpiece hose and air/water tubing is made in USA
- Trendelenburg position
- Emergency stopping security system
- Security lock system for the handpiece
- Anti-retraction valves to prevent cross contamination system
- Flush system



JPS E20A PLUS

Standard Specifications:

- Motor driven steel base plate
- Double jointed headrest
- Removable armrests
- Operating lamp & arm
- Air turbine tubing
- Air motor tubing
- 3-way syringe
- X-ray film viewer
- Instrument and assistant tray with control panel
- Air and water suction system
- Automatic water heating system
- 90 degree ceramic swiveling spittoon
- Water dispenser and cleaning system
- 4-position assistant holder
- Multi-function foot control
- Assistant stool: S8101

Features:

- All the tubing is made in USA
- Low position of the spittoon and the seat is convenient for children
- Large seat and backrest help the patient feel comfortable
- With the backrest in the low position, the patient's head is lower than his feet
- Double bottles, one for the clean water, the other one for sterilization
- Backrest and its base with emergency stop function
- Anti-retraction valves to prevent cross contamination
- Flush system



Chair Mounted Dental Unit

JPS E50A

Standard Specifications:

- Electric motor driven patient chair
- LED operation light
- Double joint headrest and removable armrests
- Instrument tray and assistant tray with touchpad
- X-ray film viewer
- High & low speed handpiece hose
- 3-way syringe
- High suction & saliva ejector
- 90° ceramic rotatable cuspidor
- 4-Timing up cup water supplier & spittoon clean system
- Clean water system
- Air & water suction (with filter)
- Disc foot controller
- Assistant stool: S8101

Features:

- All handpiece hose and air/water tubing are made in USA
- Metal coated paint
- Anti-retraction valves to prevent cross contamination
- Emergency stopping security system
- Flush system
- Radius delivery system



KID IC

Standard Specifications:

- Pad for playing cartoon movie
- Cartoon economic chair for adults & children
- LED operating light with sensor
- Double jointed headrest and safety belt
- Octopus shape instrument tray
- X-film viewer
- High & low speed handpiece hose
- 3-way syringe (one for hot, one for cold)
- High suction & saliva ejector
- Apple shape side box
- Turnable ceramic spittoon
- Built-in water purified system
- Automatic water heating system
- Multi-function foot control
- Dentist stool and assistant stool

Features:

- Cartoon design meets the children's likes, the chair design also is suited for adults
- Cartoon shape and iPad design provide the children with a happy environment and reduce their anxiety
- Safety belt provide children with a safe environment while operating
- Imported USA tubes
- Emergency stopping security system
- With phlegm flushing gargle quantitative water automatic control system
- With mouthwash constant temperature water supply system



Chair Mounted Dental Unit

OC 70

Standard Specifications:

- Three-axis operating LED lamp
- Electric motor driven chair
- Cast aluminum base and backrest
- Double jointed headrest
- Aluminum swing-down armrests
- Disc foot control
- Dentist stool: S8501

Features:

- All the tubing is made in USA
- Cast aluminum base and backrest make the chair more stable
- Soft cushion makes the patient feel comfortable
- Emergency stopping security system



JPS-S6A Ortho Mobile Cabinet

Standard Specifications:

- 3-way syringe 1pc
- Saliva ejector 1pc
- Handpiece tubing automatic control 3pcs
- Round handpiece pressure gauge
- Self-contained oilless compressor (750W, 60L/min)
- Noise: ≤W65dB(A)
- Air storage tank
- Clean water bottle system (600ml)
- Drainage bottle system (1000ml)
- Foot controller

Dentist Stool

▶ F601



▶ F602



▶ S8501



▶ S8502



▶ SY001



▶ SY002



▶ S8101




▶ S8503



▶ X6001



Color Swatch

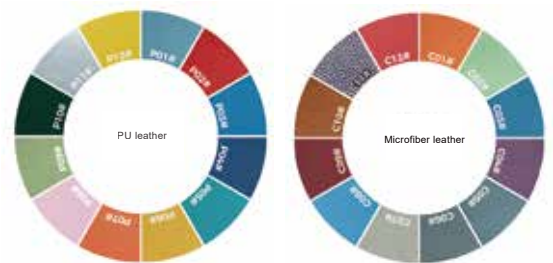

Portable Dental Products

P1 Portable Chair

Standard Specifications:

- Maximum weight support: 300kg
- High strength aluminum alloy construction
- Adjustable seat height from 350 to 610(mm)
- Can be used as standard sit-up chair
- High quality carry bag is optional
- N.W: 8kg
- G.W: 12kg
- Size: 110*52*26cm



P1A Portable Chair Package

Standard Specifications:

- Portable Chair to be fold in a suitcase
- High Strength aluminum alloy construction and support the weight of 500 lbs or more
- Adjustable backrest
- Adjustable height to be 5 positions or more
- Head pillow
- Instrument tray and cuspidor



P2 Portable Stool

Standard Specifications:

- Comfortable padded seat and backrest
- Adjustable height
- N.W: 5kg
- G.W: 7kg
- Size: 55*49*24cm



Portable Dental Products

P3 Portable Light

Standard Specifications:

- Lamp height: 41'' to 69''(104.1cm to 175.3cm)
- Boom length: 41''(104.1cm)
- Weight: 9.45lbs(4.29kg)
- AC input: 100-240V 0.16A 50-60Hz
- Consumption: 10W max
- Duty cycle: continuous
- LED life: 10,000 Hrs minimum
- Lumen maintenance>70% @30,000Hrs
- Light distribution: 10 different aperture sizes
- Nominal working distance: 16''(40.6cm) w/large aperture, or 36''(91.4cm) w/small aperture
- Light source: LED emitter



JPS P1B Portable Chair

Standard Specifications:

- Power source: hydraulic
- Unfolded size: 1720*500*600mm
- Size including instrument tray: 1720*550* (600-1000mm), height of instrument tray is adjustable
- Chair backrest angle: 100°-180°adjustable (controllable hydraulic lever)
- Chair frame leg angle: 5°
- Cushion height: 180-530mm
- Folding size: 1030mm*550mm*270mm
- Net weight: 21kg
- Cover material: PU
- Frame material: carbon steel with anti-rust treatment and with coating



JPS130 Plus Portable

Standard Specifications:

- 3-way syringe
- Dual handpiece control
- Powerful saliva ejector suction
- 600ml water reservoir and 1000ml waste container
- Powerful built- in oilless compressor (550W)
- Includes foot control switch and its storage box
- Includes instrument tray and its storage box
- Air pressure gauge
- Piezo ultrasonic scaler
- LED curing light
- Highspeed air turbine with light or not
- Air or electric motor with straight and contra angle lowspeed handpiece
- N.W: 28.5kg
- G.W: 31.5kg
- Size: 54.5*41*75cm



Oil-free Compressor



YH-200

- Power: 750W
- Flux (air flow): >90L/min(0.4Mpa)
- Max pressure: 0.75MPa
- Max air flow: 150L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 40L
- Size: 450*450*800mm
- G.W: 37kg



YHT-200

- Power: 750W*2
- Flux (air flow): >180L/min(0.4Mpa)
- Max pressure: 0.75MPa
- Max air flow: 300L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 50/60L
- Size: 720*400*700mm
- G.W: 68kg



YHT-300

- Power: 1100W*2
- Flux (air flow): >280L/min(0.4Mpa)
- Max pressure: 0.75MPa
- Max air flow: 400L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 100L
- Size: 1050*500*880mm
- G.W: 110kg



YH-400

- Power: 750W*3
- Flux (air flow): >270L/min(0.4Mpa)
- Max pressure: 0.7MPa
- Max air flow: 450L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 150L
- Size: 1350*500*870mm
- G.W: 124kg



YHT-400

- Power: 1100W*3
- Flux (air flow): >420L/min(0.4Mpa)
- Max pressure: 0.7MPa
- Max air flow: 600L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 150L
- Size: 1350*500*880mm
- G.W: 150kg



YHT-500

- Power: 1100W*4
- Flux (air flow): >560L/min(0.4Mpa)
- Max pressure: 0.7MPa
- Max air flow: 800L/Min
- Noise: ≤65dB(A)
- Rev: 1450rpm
- Air tank: 200L
- Size: 1750*500*820mm
- G.W: 185kg

Suction Motor



JPVS-1

- The bigger suction: 0.3m³/min
- Power: 0.75KW
- Vacuum: ≤-12KPa
- Noise: ≤68dB(A)
- Weight: 32kg
- Size: 520*380*650mm



JPVS-2

- The bigger suction: 0.9m³/min
- Power: 1.3KW
- Vacuum: ≤-13KPa
- Noise: ≤69dB(A)
- Weight: 36kg
- Size: 520*380*650mm



JPVS-3

- The bigger suction: 1.5m³/min
- Power: 1.5KW
- Vacuum: <-14KPa
- Max suction: 1500L/min
- Noise: <69dB(A)
- Size: 430*390*650mm
- G.W: 40kg



JPVS-5

- The bigger suction: 1.5m³/min
- Power: 1.9KW
- Voltage: 380V
- Vacuum: ≤-15KPa
- Max suction: 1500L/min
- Noise: ≤76dB(A)
- Size: 900*740*1100mm
- G.W: 104kg



JPVS-7

- The bigger suction: 2.1m³/min
- Power: 2.5KW
- Vacuum: ≤-15KPa
- Noise: ≤76dB(A)
- Weight: 112kg
- Size: 800*600*970mm



JPVS-10

- The bigger suction: 3.0m³/min
- Power: 3.3KW
- Voltage: 380V
- Vacuum: ≤-16KPa
- Max suction: 1500L/min
- Noise: ≤76dB(A)
- Size: 900*740*1100mm
- G.W: 117kg

Cabinet

Mobile Cabinet MC01

Standard Specifications:

- Porcelain countertop, no color bleeding
- Stainless steel construction
- Professional drawer compartment
- Size: 490*510*800mm
- Optional color for handles



Dental Cabinet DC5

Standard Specifications:

- Porcelain countertop, stainless steel construction, intergrated basin
- Changeable single cabinet and professional drawer compartment
- Anticorrosive and moistureproof
- Foot control water tap and knee control ash-bin minimizes the secondary pollution and cross-contamination
- Size: 2530*250*870mm
- Optional color for handles



Disinfection Cabinet DFC5

Standard Specifications:

- Stainless steel countertop and body, easy to clean
- Professional drawer compartment
- Size: 2530*250*870mm
- Optional color for handles



Dental Combined Cabinet 4A-3B-6D-6B-1B&G1-G2-G2-G2-G2

Standard Specifications:

- Articial marble top, wearable, anti-chemical, resistant to color-dip and easy to clean
- Changeable drawers and professional drawer compartment
- Foot-control water tap and knee control ash-bin minimizes the secondary pollution and cross-contamination
- Optional colors
- Dimension: L2500*D490*H860mm & L2500*D300*H600mm
N.W/G.W: 166/233kg & 83/103kg



Mobile Cart

Equipment Cart Series 1

- Main body: made entirely of ABS material.
- Power supply: equipped with a power socket at the back and a leakage-protective power cord.
- The product has a strong structure, is vibration-resistant, anti-static, non-deformable, non-aging, and has good shielding effects, with an elegant appearance and practical use.

LxWxH: 450x470x820mm



Mobile Cart JPSH-I

LxWxH: 570x470x835mm



Mobile Cart JPSH-II

Equipment Cart Series 2

- Main body: made entirely of stainless steel.



Mobile Cart JPSH-III



Stainless Steel Mobile Treatment Cart JPSH-01



Stainless steel sterile transport Cart JPSH-07



Stainless Steel Sterile Transport Cart JPSH-08



Stainless Steel Fan-shaped Implant Surgical Cart JPSH-F01

X-ray Unit

JPS 60G

Standard Specifications:

- Tube voltage: 70KVP
- Tube current: 8mA
- Focus size: 1.5mm
- Total filtration: 2.5mmAL
- Exposure time: 0.2-4sec
- Leak radiation: outside one meter \leq 0.002Mgy/h
(national standard: 0.25Mgy/h)
- Size: 152*57*26cm
- N.W.: 57kg



JPS 60B

Standard Specifications:

- Tube voltage: 70KVP
- Tube current: 8mA
- Focus size: 1.5mm
- Total filtration: 2.5mmAL
- Exposure time: 0.2-4sec
- Leak radiation: outside one meter \leq 0.002Mgy/h
(national standard: 0.25Mgy/h)
- Size: 93*36*48cm
- Net weight: 22kg
- G.W.: 30kg



Panoramic X-ray 4 IN 1 CBCT DFT-4D

Standard Specifications:

- Model: CBCT, Panoramic, Cephalometric, TMJ
- CBCT detector: amorphous silicon detector
- Grey scale: 16 bits
- Tube voltage: 70-90Kv
- Focus: 0.5 mm
- Patient position: stand up, face to face
- Scanning time: CBCT: 15s; panoramic:17s; cephalometric:0.7s/12s; TMJ: 20s
- Reconstruction: <60s
- Voxel: 0.25mm, 0.2mm, 0.1mm, 0.075mm
- FOV: 55,8*8,12*10
- Guarantee period: 3 Years
- Equipment dimensions: 1900mm(L)*1350mm(W)*1700-2400mm(H)
- Assembly dimensions:
2500mm(L)*2000mm(W)*2700mm(H), cephalometric included
2000mm(L)*2000mm(W)*2700mm(H), without cephalometric



Imaging System

Portable X-ray Unit AP-60P

Standard Specifications:

- Tube voltage: 60KV
- Tube current: 1.2mA
- Focus size: 0.4mm
- Battery: 14.8V 4400mAh
- Focal spot to skin distance: 140mm
- Exposure time: 0~2.5Sec
- Frequency: 40KHz
- Leak radiation: outside one meter $\leq 0.002\text{mGy/h}$
- (national standard: 0.25mGy/h)
- N.W./G.W.: 2.6/5.0kg
- Carton size: 28*27*25cm



Sensor

Standard Specifications:

- Chip type: CMOS APS
- Fiber optical Plate: Yes
- Scintillator: GOS

- Item model: **500A**
- Dimension: 39 x 27.5mm
- Active area: 30x22.5 mm=675mm²
- Pixel size: 18.5 μm
- Image pixel: 1.9M(1600*1200)

- Item model: **600A**
- Dimension: 45x32.5mm
- Active area: 36x27mm=972mm²
- Pixel size: 18.5 μm
- Image pixel: 2.7M(1920*1440)

- Resolution(lp/mm): theoretical: 27 lp/mm measured >12-14p/mm
- Operation system: Win7/Win10(32bit&64bit)
- Additional: works compatible with the software of KODAK, SIRONA, SCHICK, etc
- 500A or 600A is optional



Digital Dental Image Plate Scanner JPS-PSP01

Standard Specifications:

- Technical parameters
- Plate size supported: 0#, 1#, 2#, 3#
- Resolution: 14lp/mm
- Pixel size: 35 μm
- Greyscale value: 16bit
- Imaging plate erase: auto
- Communication interface: USB
- Power supply: AC 220V 50Hz (changeable)
- Dimensions: 296mmX170mmX196mm
- Operating system: Microsoft Windows 7 or above
- Data printing: office printer or DICOM printer
- Image output format: DICOM, BMP and JPG



JP-STE-8-D

Standard Specifications:

- European class B standard
- EN13060
- Vacuum pump with CN pump 10 programs
- USB port
- LCD screen
- Printer optional
- Chamber: Φ 170mmX320mm
- Power: 1750W



JP-STE-12D

Standard Specifications:

- European class B standard
- EN13060
- Vacuum pump with CN pump 10 programs
- USB port
- LCD screen
- Printer built-in optional
- Chamber: Φ 200mmX360mm
- Power: 1750W



JP-STE-18L

Standard Specifications:

- European class B standard
- EN13060
- Vacuum pump with CN Pump 10 programs
- USB port
- LCD screen
- Printer built-in optional
- Chamber: Φ 247mmX350mm
- Power: 1750W



JP-STE-23L

Standard Specifications:

- European class B standard
- EN13060
- Vacuum pumps with CN pump 10 programs
- USB port
- LCD screen
- Printer built-in optional
- Chamber: Φ 247mmX450mm
- Power: 1750W



Anesthesia JPS Easy-III

Standard Specifications:

- Booster tube
- Light inductive switch
- Aspiration/ Unlock key of inductive switch
- Speed/Music setting key
- Power/Reset of the push rod
- LED display screen

Features:

- Safe and comfortable: constantly and slowly injection; with aspiration function
- Easy operation: light inductive switch; No foot pedal
- Real-time prompt: OL ED light displays and prompt tone remind the dosage
- Music tones: free to download MP3 format music or record personalized music
- Cost saving: only use regular disposable needles, no other consumables
- Compatibility: the booster tube is compatible with two types of disposable needles (metric and british)
- Charging: High performance battery, rechargeable, easy to replace, connect the adapter directly



Automatic Dental Pressing Diaphragm/Film Machine JPS-PF01

Standard Specifications:

- Infrared sensor
- Color touch screen
- Diaphragm holder
- Emergency stop switch
- Start switch
- Thickness: 0.4mm-4mm
- Hardness: soft diaphragm, hard diaphragm
- Size: disc diameter 120mm- 127mm
- Square piece: side length 120mm-127mm

Features:

- Preset seven diaphragm specifications
- Diaphragm specification can be set automatically
- Pressurization and holding time can be set
- With a diaphragm positioning switch
- With two diaphragm positioning fixed elastic dippers
- Diaphragm can be easily loaded with one hand
- One-click stop security
- One-click start easy control
- Compatible with compression molding of all dental diaphragms/films
- Detect the diaphragm temperature to achieve precise temperature control



Small Equipment

Water Distiller JPDW-01

Standard Specifications:

- Voltage: 220/240V
- Frequency: 50Hz
- Power rating: 750W
- Distiller water: 1.5L/H
- Chamber size: \varnothing 180*200
- Outside size: 290*290*390mm
- Weight: 3.5kg
- Packing size: 245*285*510mm



Sealing Machine JPSE-02

Standard Specifications:

- Length 340mm, width 10mm
- Power: 400W
- Voltage: 220VAC 50Hz
- Size: 40*29.5*20cm
- G.W.: 6kg
- N.W: 5.5kg

Features:

- Movable cycloid bar of package
- Easy fitting suitable page sterilized of multi size (50mm/70mm/100mm)
- Closed seal area of electro heating
- Adjustable seal temperature
- Equipped with paper knife of double edges



Touch Screen Sealing Machine JPSE-03T

Standard Specifications:

- Seal speed: 10 \pm 0.5m/min
- Seal width: 12mm
- Seal margin: 0-35mm
- Temperature error: \leq 1%
- AC Power According to customer requirements
- Power: 500W
- Weight: 18kg
- Temperature range: 60-220 $^{\circ}$ C
- 560*260*220mm

Features:

- 7 color capacitive touch screen, with Android operation system graphical user interface, built-in clock, and parameters can be set up and stored. In-built color touch control screen can be used without computer connection to set up or change the operation parameters, with English input methods or using optional scanning gun.
- 8 million records of sealing and printing information can be inquired by printing parameters database or you can use wireless router to adjust them.
- Safe operation: If the sealing temperature and sealing pressure exceeds setting range, the machine will automatically stop working, which effectively guarantees the seal quality and safety.
- Printing system can print medical device labels, marks and information, Printing of sterilization date, expiry date, lot No., Sterilizer No., operators and department conforms to relevant standards.
- With in-built printer font width, space are adjustable, convenient for more information to be printed on narrow pouches; print function can be closed with one-key or partially activated.



Screen Display

Small Equipment

JPS-200 Amalgamator

Standard Specifications:

- Voltage: 220V/50Hz (110V/60Hz are available)
- Absorbed power: 200W
- Fuse: 2A
- Mixing frequency: 4500 tr/min (cpm)
- Amplitude: 25mm
- Amplitude intermittent
- Programmable mixing time 1-99 sec
- Size: 32*27*20cm
- N.W: 4kg
- G.W: 5kg



LUB 700 Lubricate Machine

Standard Specifications:

- 3 high speed handpiece positions
- 2 high speed / 1 low speed E-type motor
- 1 high speed / 2 low speed E-type motor
- Mist filters (pack of 12) & lubrication fluid & funnel & air filter*1pc for each
- Size: 44*39*46cm
- N.W: 11Kg
- G.W: 15kg



AM100 Alginate Mixer

Standard Specifications:

- Voltage: 220-240V/50Hz-60Hz
- Power: 400W
- Revolution: 3000r.p.m/50HZ 3000r.p.m/60HZ
- Scope of timing: 4-16s
- Mode of memory: 5 kinds
- Automatic computer control & numeral display
- 5 pre-set programs
- Fit for different moulage material and different mixed dosage
- Size: 21.5*31*27.5cm
- G.W: 19kg
- N.W: 15kg



JPU-605D Ultrasonic Cleaner

Standard Specifications:

- Power voltage: AC220V/50Hz or AC110V/60Hz
- Fuse tube: 2A, 250V
- Ultrasonic power: 120W
- Heating power: 150W
- Time: 1~99 minutes
- Temperature: 20°C~80°C
- Dimension of cleaning slot: 24*14*15cm
- Size: 24*14*15cm
- G.W.: 5.5kg
- N.W: 4kg
- 3L, 5L, 10L, 30L is optional



JPTW-01 Whitening Machine

Standard Specifications:

- Input voltage: AC100-240V
- Power: 40W
- Wavelength: 460-490nm
- Illumination density: 200-300mW/cm²
- Amount of LED tube: 8pcs
- Dimension of appearance (L*W*H): 150*60*123cm
- G.W: 23.5kg
- Size: 66*67*28cm



Endo Motor

Standard Specifications:

- Adaptor working voltage: 100- 240Vac, 50/60HZ;
- Adjustable torque, range: 0.6-3.9N.cm(6-39mN.m)
- 5 setting for adjustable
- Rotational speed ranging: 125rpm-625rpm
- Volume(cm): 19X13X6
- Weight(kg)/PCS: 0.7
- Packing material: carton
- QTY per master carton: 12 pc/ctn



Root Apex Locators C-Root I(VI)

Standard Specifications:

- Root canal apex finder and pulp vital measurement
- Color LCD screen display and can adjust the angle you need
- Multi-frequency design, exact accurate
- Accurate current-stabilized generate technology
- Self-test function in apex locator
- The narrow zone of the apex can be adjust if the doctor need
- Sound prompt for the apex in the narrow zone of the pulp vital
- Rechargeable Li-ion battery and charger



Handpiece

MD-LIW M4/B2 Low Speed Handpiece

Standard Specifications:

- MD-LI W M4/B2 low speed handpiece
- Internal water spray
- 1:1 Ratio
- Air pressure: 2.5-4.0KPa (25-4.0kgf/cm²)
- Water pressure: 198KPa (2.0kg)
- Rotation speed: 22,000~27,000rpm
- Bur applicable: Φ 2.334-2.355mm
- Noise: \leq 65dB
- Light source: LED white light
- The voltage of bulb: 3.0-3.2V



MD-LOW01 M4/B2 Low Speed Handpiece

Standard Specifications:

- External spray
- 1:1 Ratio
- E-type connector
- Latch type
- Optional midwest and borden
- Contra angle for CA bur Φ 2.334~2.355mm
- Straight handpiece for HP bur Φ 2.35
- Air pressure: 0.3MPa
- Rotation speed: 18,000~25,000rpm



ROSE 3000 Brushless Micromotor

Standard Specifications:

- Internal water spray
- Rotation speed: digital step-less speed modulation
- Tiptop: max 40000RPM/Min
- Voltage: 24V AC/DC
- Dimensions: L122 \times 22 (mm)
- weight: 120g
- Power: 100W
- Connect: ISO-E tepe international connector
- Control manner: manual/foot control
- Torque: 250gf.cm
- Micromotor autoclavable at 135 $^{\circ}$ C max



ROSE 4000 Brushless Micromotor

Standard Specifications:

- Brushless electrical motor for dental unit
- E-type connector for both straight handpiece and contra-angle
- Internal water spray, with LED/fiber optic
- Tiptop: 2000-4000RPM/Min
- Voltage: 24V AC/DC
- Dimensions: L136×22 (mm)
- Weight: 120g
- Power: 100W
- Super torque, low noise, athermic



Dental electric motor Brushless LED JPS-CP+

Standard Specifications:

- IE type connector with international compatible, connector: compatibility
- with 1:1,1:5,16:1 type, straight and contra angle handpiece
- Internal cooling system with LED fiber optic
- Power: 100w
- Rotation speed range:
 - 2000rpm-40000rpm(1:1)
 - 125rpm-2500rpm(16:1)
 - 10,000rpm-200,000rpm(1:5)
- Max output torque: 250gf.cm

Standard Specifications:

- Wide viewing angle color LCD screen
- Big size color LCD, rich information display
- Touch key control, easy to use
- Built-in, control panel can be easily installed at any angle
- Pneumatic/manual start automatically switch
- Built-in 7 program memory
- Custom the air pressure of starting motor
- LED lighting delay off time is adjustable
- Speed, steering can be adjusted
- The motor can be autoclaved



Push Button High Speed Handpiece JX-T M4/B2

Standard Specifications:

- Borden 2holes or midwest 4holes connection
- Single spray
- Bur dia. 1.59-1.6mm
- Speed 300,000-370,000rpm
- Newly hygienic surface coating
- Repeated autoclavable at up to 135 °C
- Operate at minimum air pressure 2.5kgf/cm²
- Large torque, standard or mini head optional



Handpiece

Push Button High Speed Handpiece JX-TM M4/B2

Standard Specifications:

- Borden 2holes or midwest 4 hole connection
- Single spray
- Bur dia. 1.59-1.6mm #speed 300,000-370,000rpm
- Newly hygiene surface coating
- Repeated autoclavable at up to 135°C
- Operate at minimum air pressure 2.5kgf/cm²
- Large torque, standard or mini head optional



45 Degrees Surgical Handpieces JX-45M M4/B2 CC

Standard Specifications:

- Specialized for impacted teeth (LED available)
- Borden 2holes or midwest 4holes connection
- Single spray
- Anti-retraction
- Air pressure: 0.25-0.3MPa



F.O High Speed Handpiece with NSK Quick Coupling JX-T3FQ NK

Standard Specifications:

- Push button chuck
- Borden 2holes or midwest 4holes connection
- Triple spray
- NSK quick coupling
- Bur dia. 1.59-1.6mm #speed 300,000-370,000rpm
- Newly hygienic surface coating
- Repeated autoclavable at up to 135°C
- Operate at minimum air pressure 2.5kgf/cm²
- Large torque, standard or mini head optional



F.O High Speed Handpiece with Kavo Quick Coupling JX-T3FQ KV

Standard Specifications:

- Germany bearing with sufficient torque for outstanding cutting efficiency
- Push button chuck for quick, easy bur change
- Multi-port spray to provide a fine spray mist for better visibility, cooling and cutting speed
- Durable fiber optic glass illuminator with illumination 25,000 LUX to reduce eyestrain and
- high transmissivity and thermostability
- Connect directly to Kavo LED quick coupling
- Repeatedly autoclavable at up to 135°C
- Operate at minimum air pressure 2.5kgf/cm²
- Large torque standard optional



Curing Light

LED Curing Light XLITE-4

Standard Specifications:

- Light source: high power blue violet LED
- Wavelength range: 385-515nm
- Light intensity: >2,000mW/cm²
- Battery: lithium ion battery (battery full power running time: at least 120 minutes)
- Power adapter
- Input: 100-240V AC 50/60HZ
- Output: 5V DC 2A
- Charger time: about 120 minutes
- Small lens for optional accessories



LED.G Built in Curing Light

Standard Specifications:

- Light output: 1000mW/cm²
- Wavelength: 420-480nm
- Three working modes: full, ramping, pulse
- The light source adopts the original American LED
- The optical fiber can be autoclaved under the high temperature of 135 °C and the pressure of 0.22MPa



LED Curing Light X2

Standard Specifications:

- Light output: 2300mW/cm²
- Parallel light output, uniform illumination
- Three working modes: full power mode, progressive mode, pulse mode
- Super small lamp holder, 270° rotatable
- White REF. 10316
- Black REF. 10319



JPS FU Curing Light

Standard Specifications:

- Charging dock Input: AC100~240V, 50/60Hz
- Charging dock output: DC5V, 1A
- Battery: DC 3.7V, 2200mAh
- Light Intensity: 1600~3200 W/cm²
- Working time: 1s, 3s, 5s, 10s, 15s, 20s, 25s, 30s, 35s, 40s
- Lighting mode: full power, progressive, pulse
- Main unit dimensions: 33×27×206mm
- Packing size: 312×152×72mm
- Weight of main unit: 0.25kg
- Gross weight: 0.9kg



JPS LED2000i Curing Light

Standard Specifications:

- Charging dock Input: AC100-240V, 50/60Hz
- Charging dock output: DC5V, 1A
- Battery: DC 3.7V, 2200mAh
- Light Intensity: 1600~2400 W/cm²
- Working time: 1s, 3s, 5s, 10s, 15s, 20s, 25s, 30s, 35s, 40s
- Lighting mode: full power, progressive, pulse
- Main unit dimensions: 33×29×226mm
- Packing size: 220×170×100mm
- Weight of main unit: 118g
- Gross weight: 500g



Ultrasonic Scaler

Ultrasonic Scaler IO2/IO3

Standard Specifications:

- Compatible with EMS handpiece, tip, and cable
- Automatic frequency tracking
- Function: scaling and perio
- Handpiece: detachable handpiece
- Five tips attached
- Option:
IO2: without light
IO3: with LED light



Ultrasonic Scaler P7

Standard Specifications:

- Scaling/Perio/Endo
- Aluminum alloy handpiece
- No cracking! More comfortable!
- LED handpiece
- Detachable handpiece can be autoclaved under high temperature and pressure (135 C , 0.22MPa)
- Rate: 30vDC
- Frequency: 28kHz \pm 3kHz
- P7 ultrasonic scaler with H3 alloy detachable (autoclavable)
- Handpiece and 6pcs tips (T1*1, T2*1, T3*1, T4*1, T5*1, E1*1)
- Scaling and endo and perio
- EMS compatible, TW2 torque wrench, CE certified



Ultrasonic Scaler P9

Standard Specifications:

- Built-in power supply
- LED handpiece
- Detachable handpiece can be autoclaved under the high temperature and pressure (135 C , 0.22MPa)
- Aluminum alloy handpiece
- Obtaining national patents
- Scaling, endo, identifying scaler tip automatically
- PC control, automatic frequency tracking
- P9 auto water supply scaler with H3 alloy detachable (autoclavable) handpiece
- TW3 alloy torque wrench, 2pcs bottles and 6pcs tips (T1*1, T2*1, T3*1, T4*1, T5*1, E1*1)
- Scaling and endo, CE certified



Intraoral Camera

Wired Oral Camera JPS-3SX

Standard Specifications:

- Power: AC100-240V
- Pixel: 8.0 mega pixel
- Lens: HD macro lens
- Monitor: 17 inch
- Image storage: TF card
- Backlight: 10pcs LED
- Interface: HDMI/TV port/USB
- Image format: JPG
- Play multimedia: video, music, pictures
- Resolution: 1280*1024
- Scan QR code to download image to smartphone



Patented 5G Wireless USB Oral Camera JPS-9WA

Standard Specifications:

- Wireless USB camera
- 6mm super thin camera
- 5G WIFI transfer
- Video recording
- 2500mAh battery
- 12 bright LEDs
- Free software
- Waterproof & dustproof design



Intraoral Camera JPS 867-M plus

Standard Specifications:

- Power supply: USB 5V
- Resolution: 1920*1080P
- Output format: UVC
- Size: 385*335*45mm(not include base)
- Voltage: DC 12V
- Electric current: 2.1A
- Power: 25W
- Monitor size: 17 inch
- Storage: USB disk
- Touch screen type
- 6mm ultra-thin lens
- Wifi scan QR code to download pictures



Spare Part



Syringe #7011



Syringe #7021



Autoclavable Universal Vacuum Valve #1802



Autoclavable Saliva Ejector Valve #1805



Autoclavable Premium Saliva Ejector Valve #1806



Autoclavable Premium Universal Vacuum Valve #1801



4 hole Handpiece Stainless Steel Nut #1611



4 hole Midwest Connector #1613



3/4 hole Handpiece Control Block #1101/#1102



Male Quick Disconnect #1604



Female Quick Disconnect #1605



Handpiece Tubing Adapter 4 to 2 #1606



Wet/Dry & Chip Blower Disc-type Foot Control #1401



Economy Disc-type Foot Control #1403



Handpiece Tubing Adapter 2 hole Handpiece on a 4 hole Connector #1608

Spare Part



Dual Master Shut-off Valve
#1103



Dual Master Shut-off Valve with Filters
#1105



Integrated Master Shut-off Valve with Regulaor, Filter and Gauge #1106



Self-Contained Water Systems
#1107



Suction Valve Control Block
#1104



Watterr Relay, Non-retraction
#1205



Micro Switch for HP
#1308



Foot Control Toggle Valve Assembly
#1405



Syringe Tips
#2109



2/3-way Push Button Valve
#1501/#1502



2/3 Toggle Valve
#1504/#1505



Water Flow Control Valve
#1705



Main Valve of Foot Control
#1407



Needle Valve
#1703



Strong Suction Valve
#1807

AX-2000B Vacuum Mixer

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 150W
- Motor rotational speed: 320rpm
- Mixing beaker: 750ml
- Vacuum: 0.08-0.09MPa
- Built-in vibrator: variable speed
- N.W./G.W.: 25/30kg
- Size: 49*42*62cm



AX-4-10B Intelligent Burnout Furnace

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 4,000W
- Temperature rating: 1000
- Heating elements: ceramic fiber
- Capacity: large casting rings*7 or large casting rings*4 and small casting rings*4
- Chamber size: 12*30*20cm (H*W*D)
- N.W./G.W.: 55/65kg
- Size: 75*54*86cm



AX-MTA Model Trimmer

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 550W
- Rotational speed: 2,800RPM
- Water pressure: 0.5~2kg
- Disc size: 25.5/2.55/0.65cm (OD/ID/T)
- Disc materials: corundum/diamond
- Water supply method: manual
- N.W./G.W.: 21/23kg
- Size: 55*42*42cm



AX-MTB Model Arch Trimmer

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 150W
- Motor rotational speed: 2,800rpm
- Grinding head: C 625 M06
- Optional accessories:
 - Dust extractor (reference)
 - AX-SUPER800, AX-MX800)
- N.W./G.W.: 21/23kg
- Size: 51*40*50cm



AX-88 Laser Pin

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 150W
- Rotational speed: 2,800RPM
- Drilling depth:
 - 0~12mm (adjustable)
- N.W./G.W.: 14/16kg
- Size: 27*26*47cm



AX-DC2 Die Cutting Machine

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 110W
- Rotational speed: 3,500RPM
- Disc size: 80/16/0.25mm (OD/ID/T)
- Optional accessories: dust extractor (Reference JPS-SUPER800, JPS-MX800)
- N.W./G.W.: 21/23kg
- Size: 51*40*50cm



AX-Z2 Vibrator

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 100W
- Max load: 2kg
- N.W./G.W.: 4/5kg
- Size: 29*27*17cm



AX-ZL3 Induction Casting Machine

Standard Specifications:

- Power supply: 220V/110V 50/60Hz
- Power consumption: 2,500W
- Motor: 370W
- Centrifugal rev: 550rpm
- Centrifugal radius: 21cm
- Casting method: centrifugal casting
- Max melting amount: 50g
- Heating method: medium frequency induction heating
- Melting time: 30g≤65sec (standard)
- Cooling fashion: air cooling
- N.W./G.W.: 115/123kg
- Size: 63*63*112cm



Dental Consumables

Dental Disposable

Micro Applicator

Model	Description
DTA4000R	Micro applicator, regular size (green/orange)
DTA4000F	Micro applicator, fine size (yellow/blue)
DTA4000SF	Micro applicator, super fine size (white/purple)

Packing:

100pcs/tube 4tubes/box 36boxes/ctn



Air/Water Syringe Tip

Model	Description
DTA6100	3-way syringe tip white cover w/metal core
DTA6200	3-way syringe tip white cover w/plastic core
DTA6202	3-way syringe tip multicolored cover w/plastic core

Packing:

125pcs/jar 2jars(250pcs)/box 36boxes/carton



Prophy Brush & Cup

Model	Description
DTA5300	Prophy brush, flat, white (nylon) for contra angle HP
DTA5310	Prophy brush, flat, black (bristle) for contra angle HP
DTA5320	Prophy brush, flat, white (nylon), screw on
DTA5330	Prophy brush, flat, white (nylon) for contra angle HP
DTA5340	Prophy brush, flat, black (bristle) for contra angle HP
DTA5350	Prophy brush, flat, white (nylon), screw on
DTA5360	Prophy brush, flat, white (nylon) for contra angle HP
DTA5370	Prophy brush, flat, black (bristle) for contra angle HP
DTA5505	Prophy brush, flat, white (nylon), screw on
DTA5525	Prophy brush, flat, black (bristle) for contra angle HP
DTA5535	Prophy brush, flat, white (nylon), screw on

Packing:

144pcs/box 100boxes/ctn



Prophy Angle

Model	Description
D1A5100F	Latex free, disposable prophy angles, 144pcs/box, firm
D7A5101F	Latex free, disposable prophy angles, 500pcs/box, firm
DTA5100S	Latex free, disposable prophy angles, 144pcs/bag, soft
DTA5101S	Latex free, disposable prophy angles, 500pcs/bag, soft
DTA5200BF	Latex free, disposable prophy angle brush, flat, 500pcs/bag
D17K53OBT	Latex free, disposable prophy angle brush, tapered, 500pcs/bag

Packing:

Individual Packing: 20boxes/caM(D7A5100) /8boxes/caM(D1ALK6101)



Dental Disposable

Mixing Tip

Model	Description
For all HP style 50ml impression material cartridges	
DTA3100	Yellow 4.2mm
DTA3110	Pink 5.4mm
DTA3120	Green 6.5mm
DTA3130	Purple 7.5mm with Monophase and Heavy
For temporary crowns, bridges and acrylics with three different kinds of ratios including 10:1, 4:1 and 1:1	
DTA3140	Blue/Orange-10:1 and 4:1 Ratio
DTA3150	Blue/Clear-1:1 Long tapered
DTA3160	Blue/Clear-1:1 Short blunt
High Performance Mixing Tips for temporary cement with 1:1 ratio	
DTA3180	Short Tapered, Brown-1:1 Ratio
DTA3185	Short Blunt, Brown-1:1 Ratio
For use with automatic impression material mixing systems	
DTA3170	Dynamic
Intraoral Tips fitting with any universal mixing tips	
DTA3190	Yellow Color
DTA3193	Small Opening
DTA3196	Large Opening
DTA3198/3199	Fitting with DTA3185



Mixing Gun

Model	Description
DTA0745	Dispensing Gun, 1:1 & 1:2
DTA0746	Dispensing Gun, 1:4 & 1:10

Features:

Both types of dispensing guns are used to extrude impression materials and bite registration materials from cartridge. Each of them consists of a release lever and a plunger, which are coordinated simultaneously to load and remove the cartridge. DTA0745 work with 1:1 and 1:2 cartridges while DTA0746 with 1:4 and 1:10 Perfect Performance with our series of Mixing Tips!

Packing:

1pc/box 20boxes/ctn



Dental Disposable

Impression Product




DKA709032

- Disposable, smooth surface
- 1-9 marks on the handle of the trays
- Carton size: 42*42*27cm
- Packing: 1set/bag 100bags/ctn
- Weight: 9.5kg
- Color: blue, yellow



DKA709032A

- Autoclave for repeated use
- Carton size: 42*42*27cm
- Packing: 1set/bag 100bags/ctn
- Weight: 9.2kg
- Color: clear white



DKA737

- Specification: (S) 165*55mm
(M) 182*60mm
(L) 193*65mm
- Carton size: 71x36*65.5cm
- Packing: 50pcs/bag 80/60/50boxes/ctn
- Weight: 5kg
- Remark: S/M/L

Syringe



Curved utility syringe
DKA-Q-105

- Polypropylene plastic; 12ml with case; self-enclosed medical piston. Ideal for teeth clearing, impression material injection, family care after operation, and the fluoride treatment
- Packing: 50pcs/bag 25bags/ctn
- Weight: 12.5kg
- Carton: 50*36*43cm



Straight Syringe
DKA-Q-107

- Be the carrier of amalgam after mixer when filling
- Include push handle, angled delivery socket and spring bolt
- Packing: 100pcs/bag 5bags/ctn
- Weight: 8.5kg
- Carton Size: 46*34*23cm



Amalgam Carrier
DKA-Q-106

- Angled with both ends working to take both anterior and posterior films, Help taking perfect and accurate pictures. Help finishing the technique photograph of correcting the angular bisector
- Specification: 126*25*11mm
- Packing: 50pcs/bag 20bags/ctn
- Weight: 8.5kg
- Carton: 42*33*31cm

Tip




Saliva ejector
DKA701024

- Usage: universal standard saliva
- Ejector: pliable, holds their shape and the tip minimizes tissue impingement, make comfortable of patients
- Size: 150*6.5mm
- Material: PVC
- Remarks copper & zinc galvanized
- Inner dia.: 5.3mm
- Packing: 100pcs/bag 20bags/ctn
- Weight: 12kg
- Carton: 395*330*180mm



Evacuation tips
DKA-Q-116

- Usage: whiversal disposable evacuation
- Tips: two type: vented and non-vented for your choice, provides comfortable and soft suction action against tissue during evacuation. smooth surface and rounded tips to provide extra comfort to patient. fits all standard 11mm suction tube
- Size: 148*11mm
- Material: PP/PE
- Remarks: 10mm inner dia
- Packing: 100pcs/bag 20bags/ctn
- Weight: 8kg
- Carton: 420*330*310mm

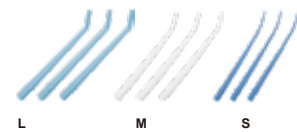

Surgical aspirator tips
DKA-Q-102/103/104

- Size: L (green) 5.8mm 1/4"
M(white) 3.8mm 1/8"
S(blue) 2.5mm 1/16"
- Material: PP/PE
- Packing: 25pcs/bag 100bags/ctn
- Weight: 9.5kg
- Carton: 395*395*360mm

Dental Disposable

Wedge

Usage: Special design, easily make the wedges insert into the crack of the teeth, protect the gingiva from damage; square design for bottom more convenient to hold



Common Plastic Wedges
DKA0725

- Size:
L: 16*2.6*2.2mm M: 14*2.2*2mm
S: 12*1.9*1.9mm SS: 10*1.6*1.5mm
Brush length: 8mm
- Color:
L: purple M: yellow
S: green SS: blue
- Material: PE
- Packing: 100pcs/bottle
16bottles/box 36boxes/ctn
- Wight: 10-10.5kg
- Carton: 39*39*22cm



Plastic Poly Wedges
DKA0728

- Size:
orange: 1.3*1.5*13mm
white: 1.5*1.5*14mm
green: 1.5*1.5*14mm
yellow: 1.5*1.5*16mm
blue: 1.5*2.0*14mm
pink 1.5*2.0*16mm
- Packing: 100pcs/bottle
16bottles/box 36boxes/carton
- Wight: 9-9.5kg
- Carton: 39*39*22cm



Wooden Wedges with Hole
DKA750013-2

- Size:
L: 17.8*2.8mm M: 17.8*2.45mm
S: 17.8*2.1mm SS: 17.5*1.7mm
- Color:
L: purple M: yellow
S: green SS: blue
- Packing: 100pcs/bottle
16bottles/box 36boxes/carton
- Wight: 9-9.5kg
- Carton: 39*39*22cm



Poly Wedges with Long Handle
DKA0729

- Slize:
L: 81*2.7mm M: 80*2.6mm
S: 75*2.1mm
- Color:
L: orange M: blue
S: yellow
- Packing: 100pcs/bag 3bags/box
40boxes/carton
- Wight: 9kg
- Carton: 41*27*17cm

Mixing Bowl

Flexible plastic material washable for repeated use. Available of six different kinds of mixing bowls for different use



DKA865001

- Size: 130*96mm
- Color: blue, black, clear blue, clear red
- Material: PVC
- Packing: 100pcs/ctn
- Wight: 14kg
- Carton: 560*270*250mm



DKA865002

- Size: 108*59mm
- Color: blue, black, clear blue, clear red
- Material: PVC
- Packing: 180pcs/ctn
- Wight: 14kg
- Carton: 430*330*290mm



DKA865003

- Size: 84*50mm
- Color: blue, black, clear blue, clear red
- Material: PVC
- Packing: 250pcs/ctn
- Wight: 14kg
- Carton: 410*270*235mm

Spatula



Autoclavable SPATULA
DKA-TD-01

- Usage: straight spatula, the handle is arabesquitic, easily of handling, flat and smooth fore-end of the spatula is better for mixing the medicine well
- Size: 195*32mm
- Color: pink, white, blue, yellow
- Material: PP
- packing: 25pcs/box 24boxes/ctn
- Weight: 14kg
- Carton: 430*320*290mm



Autoclavable SPATULA
DKA-TD-02

- Usage: small spatula, smooth surface, good effect of mixing up the medicine well
- Size: 185*25mm
- Color: pink, white, blue, yellow
- Material: PP
- packing: 25pcs/box 24boxes/ctn
- Weight: 9kg
- Carton: 410*270*230mm



Autoclavable SPATULA
DKA-TD-03

- Usage: autoclavable can be heated to 121°C, handle designing according to the shape of hands, closely and comfortable of holding big fore-end of the spatula, convenient for mixing upl the medicine well
- Size: 185*33mm
- Color: pink, white, blue, yellow
- Material: PP
- Packing: 20pcs/bag 24bags/ctn
- Weight: 7.2kg
- Carton: 410*270*230mm

Dental Disposable

Cotton Roll Dispenser



DKA801019

- Specification: 112*48*120mm
- Carton size: 440*290*400mm
- Packing: 1pc/box, 30boxes/ctn
- Weight: 6.8kg
- Color: red, green, blue, black
- Feature: autoclave, can be heated to 135°C, streamline design, all clear material



DKA742-1

- Specification: 120*97*55mm
- Carton size: 500*310*220mm
- Packing: 1pc/box, 40boxes/ctn
- Weight: 9.5kg
- Color: white, blue, red, yellow
- Feature: press type, foam cm for the entrance of the cotton roll



DKA742

- Specification: 108*100*52mm
- Carton size: 455*345*230mm
- Packing: 1pc/box, 42boxes/ctn
- Weight: 13kg
- Color: white, blue, red, yellow
- Feature: drawer type

Denture Box



DKA888010

- Size: 92*85*57mm
- Color: white, blue, pink, green
- Material: PP
- Packing: 12pcs/box 16boxes/ctn



DKA763006A

- Size: 82*85*46mm
- Color: yellow, pearl green, white, clear blue, pink, pearl red
- Material: PP
- Packing: 12pcs/box 24boxes/ctn



DKA763006B

- Size: 82*85*29mm
- Color: yellow, pearl green, white, clear blue, pink, pearl red
- Material: PP
- Packing: 12pcs/box 30boxes/ctn



DKA796008A

- Size: 95*73*56mm
- Color: yellow, light blue, light green, white, clear blue, pink
- Material: PP
- Packing: 12pcs/box 16boxes/ctn



DKA796008B

- Size: 95*74*39mm
- Color: yellow, white, pink, light blue, light green, clear blue
- Material: PP
- Packing: 12pcs/box 18boxes/ctn

Dental Disposable

Denture Box



DKA796009

- Size: 99*77*59mm
- Color: light blue, light green, white, yellow, orange
- Material: PP
- Packing: 12pcs/box 16boxes/ctn



DKA796010

- Size: 86*78*78mm
- Color: white box, green net
- Material: PP
- Packing: 4pcs/box 30boxes/ctn



DKA796011

- Size: 78*80*28mm
- Color: yellow, light blue, light green, rose red, white, pink
- Material: PP
- Packing: 12pcs/box 30boxes/ctn



DKA010

- Size: 80*66*27mm
- Color: yellow, blue, green, rose red, white
- Material: PP
- Packing: 12pcs/box 30boxes/ctn



DKA009

- Size: 115.8*92.8*37.6mm
- Material: ABS & PC
- Packing: 1pc/box 40boxes/ctn



DKA012

- Size: 100*83.5*40mm
- Material: PP
- Packing: 8pcs/box 30boxes/ctn

Dental Kit



DKA745017

- Including: mouth mirror, probe, forceps
- Remarks: 3 in 1 disposable dental kit
- Packing: 20sets/bag, 25bags/ctn
- Carton Size: 42*23*27cm
- Weight: 7.5kg



DKA-QXH-2

- Including: mouth mirror, probe, forceps, bibs, cotton ball, facial tissues, trays can be tie-in 3 in 1 tips or pouring cup
- Packing: 200sets/ctn
- Carton Size: 460*41*40cm
- Weight: 8.6kg

Dental Disposable

Bur Holder Box & Frame



DKA794015

- Autoclavable can be heated to 121°C
- 60 slots high and low speed bur holder box
- Special cover on top prevent from dust
- Specification: 89*66mm
- Packing: 1pc/box 60boxes/ctn
- Weight: 5.5kg
- Carton size: 47.5*30*29.5cm
- Remark: round, 60slots



DKA794016

- Autoclavable, can be heated to 121°C
- 24 slots high and low speed bur holder box
- Special cover on top prevent from dust
- Specification: 74*60*36mm
- Packing: 1pc/box 100boxes/ctn
- Weight: 4.5kg
- Carton size: 41*27*23.5cm
- Remark: square, 24slots



DKA794017

- Autoclavable, 24 slots bur holder frame
- Specification: 65*38*12mm
- Packing: 20pcs/bag 36boxes/ctn
- Weight: 9kg
- Carton size: 41*27*23.5cm
- Remark: 24slots, autoclavable

Compu Dispenser Gun



DKA801020

- Injection guns fit the human engineering
- Match up with most of the charging barrel
- Best choice of sticky material
- Specification: 150*100mm
- Packing: 160pcs/ctn
- Weight: 8kg
- Caroton size: 44.5*34.5*23cm

Mixing Well



DKA-807301 DKA-807300

DKA-801014

- Specification: 4 well: 50*50*10mm
- 2 well: 50*27.6*10mm
- mixing rod: 110*4mm
- Packing: 200pcs/bags 19bags/ctn
- 240pcs/bag, 24bags/ctn
- 100pcs/bag, 50bags/ctn
- Weight: 12kg/9kg/8.5kg

Glass Dappen Dish



DKA734

- Assorted colored, suitable to mix small dose
- Specification: 33*33mm
- Packing: 12pcs/box 18boxes/ctn
- Weight: 9.6kg
- Carton size: 35*17*22.5cm

Barrier Film

DKA-X-129

- Length of each sheet: 15cm
- Width of each sheet: 10cm
- Total 1200 sheets, blue color and clear for your choice
- Specification: 101.6*152.4*0.03mm
- Packing: 8rolls/ctn
- Weight: 9.5kg
- Carton size: 41*27*12.5cm
- Remarks: with edge/without edge



Dental Disposable

Cheek Retractor



DKA-748022

- Usage: cheek retractor, durable and autoclavable, can be heated to 135°C long handle provides ease of application, smooth surface make patients very comfortable
- Size: L: 120*53.5*18mm
S: 115*42*17mm
- Color: clear blue, Clear
- Material: PC
- Packing: L: 2pcs/box 200boxes/ctn
S: 2pcs/box 250boxes/ctn
- Weight: 6kg
- Carton: L: 42*33*31cm
S: 45*35*23cm



DKA-X-130

- Usage: vertical to open the mouth, perfect view for environment and working area. autoclavable can be heated to 135°C, good flexible make patients very comfortable
- Size: L: 130*92*21mm
M: 118*85*17mm
S: 96*70*15mm
- Color: clear blue, clear
- Material: PC
- Packing: 2pcs/box 200boxes/ctn
- Weight: L/M: (8.5kg) S (4kg)
- Carton: L/M: 50*36*43cm
S: 43*33.5*29.5cm



DKA-747021

- Usage: To open the mouth, control the tongue, design of anatomy. autoclavable, can be heated to 135°C
- Size: L: 126*57*51mm
M: 106*48*54mm
S: 100*44*40mm
- Color: clear blue, clear
- Material: PC
- Packing: L: 2pcs/box 147boxes/ctn
M/S: 2pcs/box 246boxes/ctn
- Weight: L: (6.8kg) M: (8.6kg) S: (7.6kg)
- Carton: L /M: 42*42*47cm
S: 45.5*33.5*29cm

Safety Glasses

DKA-Q-111

- Usage: medical safety glasses, exquisite design, protect eyes from being injured all kinds of overall anti-fog, anti-hard light, anti-ultraviolet rays, smooth surface make wearing more comfortable
- Color: red, white, orange
- Material: PC
- Packing: 12pcs/box 12boxes/ctn
- Weight: 8.5kg
- Carton: 50*43*36cm



DKA736

- Usage: legs can stretch out and draw back which is more comfortable for wearing, avoiding all kinds of splash, common and anti-fog for your choice
- Color: red, yellow, blue
- Material: PC
- Packing: 12pcs/box 18boxes/ctn
- Weight: 10kg
- Carton: 50*43*36cm



Tray

**Autoclavable PLASTIC TRAY
DKA-Q-117**

- Usage: autoclavable plastic trays, can be filled with different kinds of medical instruments, against contamination
- Size: 336*240*23mm
- Material: PP
- Packing: 40pcs/ctn
- Weight: 11kg
- Carton: 410*270*235mm



**Disposable plastic trays small even one
DKA-TP-2**


- Usage: economical, utility disposable plastic trays, Including: shelf, mixing plates, cotton yarn case etc, more convenient and hygiene
- Four model for your choice
- Size: 190*148*15mm
- Material: PP
- Packing: 400pcs/ctn
- Weight: 2.72kg
- Carton: 27.5*21.8*32cm



Dental Disposable

Surgical Blade

- Surgical blades
- Material: carbon steel stainless steel
- Packing: individually packed in aluminum foil
- Sterilization: gamma ray

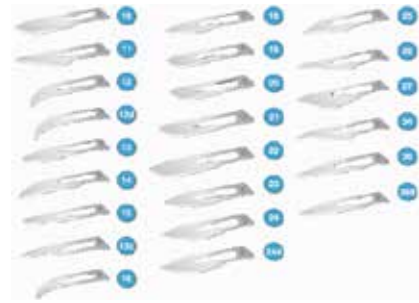

Suture

- Absorbable sutures
 - Polyglycolic acid (PGA)
 - Rapid polyglycolic acid (PGAR)
 - Polyglactin 910 (PGLA)
 - Polydioxanone (PDS)
 - Poliglecaprone 25(MO)
 - Chromic catgut (CC)
 - Plain catgut (Cp)
- Non-absorbable sutures
 - Silk (SK)
 - Nylon (NL)
 - Polypropylene (PM)
 - Polyester (PB)
 - Stainless steel wire (SS)



Dental Needle

- Sharp tri-bevel point, for maximum comfort screw-in
- System: inch type, metric type and monoject type unit
- Package: heat-sealed plastic container or label butt-end length: 11 mm

Available size

Size	Diameter/mm	Length of needle	Hub colour
30gauge short	0.3	25	yellow
30gauge short	0.3	21	yellow
30gauge extra short	0.3	16	yellow
30gauge extra short	0.3	12	yellow
30gauge extra extra short	0.3	8	yellow
27gauge long	0.4	38	grey
27gauge short	0.4	25	grey
27gauge extra short	0.4	16	grey
27gauge extra short	0.4	12	grey
25gauge long	0.5	38	orange



Aspirating Syringe

- 049-0100 KAS CW
- 1.8ml (USA/METRIC THREAD)
- 049-0200 KAS CW
- 1.8ml (USA/METRIC THREAD)



049-0100



049-0200

Gutta Percha Points



0.02 Taper

- Type: 15# 20# 25# 30# 35# 40# 45# 50# 55# 60# 70# 80# 90# 100# 120# 130# 140#
- Packing: 15-80# (120pcs/box) 90-140# (60pcs/box)



T0.04/T0.06 Greater Taper

- Type: 15# 20# 25# 30# 35# 35# 40# 45# 50# 55# 60# 70# 80#
- Packing: 15-40# 45-80# (60pcs/box)



Accessory

- Type: XF FF MF F FM M ML L XL
- Packing: One type or Mixed 100pcs/box



Pro-taper

- Type: F1 F2 F3 F4 F5
- Packing: F1-F5 (60pcs/box)

Absorbent Paper Points



0.02 Taper

- Type: 15# 20# 25# 30# 35# 40# 45# 50# 55# 60# 70# 80# 90# 100# 110# 120# 130# 140#
- Packing: 15-80# (200pcs/box) 90-140# (100pcs/box)



T0.04/T0.06 Greater Taper

- Type: 15# 20# 25# 30# 35# 40# 45# 50# 55# 60# 70# 80#
- Packing: 15-40# 45-80# (100pcs/box)



Accessory

- Type: XF FF MF F FM M ML L XL
- Packing: one type or mixed 180pcs/box

Endo Box

- ID201 Pulpa Box
Colors: Red/Blue, 18holes for endodontic instruments
- ID202 Gutta Box
Colors: Red/Blue, 6 autoclavable plastic cups
- ID203 High Speed Burs Box
Colors: Red/Blue, 9holes for burs (FG)
- ID204 Low Speed Burs Box
Colors: Red/Blue, 6holes for burs (RA)
- ID205 Scaling Tip Box
Colors: Red/Blue, 6holes for scaling tips

- ID211 Endo Micro Pulpa
Colors: Red/Blue, 30holes for endodontic instruments
- ID212 Endo Micro Gutta
Colors: Red/Blue, 6 autoclavable plastic cups
- ID213 Endo Micro High Speed Burs
Colors: Red/Blue, 14holes for burs (FG)
- ID214 Endo Micro Low Speed Burs
Colors: Red/Blue, 6holes for burs (CA)
- ID215 Endo Micro Scaling Tip
Colors: Red/Blue, 6holes for scaling tips
- ID216 Endo Micro Low Speed Burs & Scaling Tip
Colors: Red/Blue, 3holes for burs (CA) & 3 holes for scaling tips

- ID221 Endo Mini Pulpa
Colors: Red/Blue, 60holes for endodontic instruments
- ID222 Endo Mini Gutta
Colors: Red/Blue, 18 autoclavable plastic cups
- ID223 Endo Mini High Speed Burs
Colors: Red/Blue, 36holes for burs (FG)
- ID224 Endo Mini Low Speed Burs
Colors: Red/Blue, 16holes for burs (CA)
- ID225 Endo Mini Scaling Tip
Colors: Red/Blue, 16holes for scaling tips
- ID226 Endo Mini Low Speed Burs & Scaling Tip
Colors: Red/Blue, 10holes for burs (CA) & 6holes for scaling tips
- ID227 Endo Mini Burs
Colors: Red/Blue, 18holes for burs (FG) & 10holes for burs (CA)



Multi Layer Synthetic Resin Teeth (Two/Three Layer)

- High molecular weight poly (methyl methacrylate) polymer as raw materials, and possess excellent biosafety, look like natural teeth precisely both in shade and form. Apple CAD/CAM technology process mould, and make sure the artificial teeth possess good precision and symmetry
- Moulds:
 - Upper T T1-T2-T3-T5-T6-T7-T8-T9-T10
 - Upper S S1-S2-S4-S6
 - Upper O O1-O2-O6-O8
 - Lower L L25- L37-L44-L46-L62-L67-L68
- Posteriors S S28-S30-S32-S3
- Posteriors M M32-M34
- Shades: Vita A1-A2-A3-A3.5-A4-B1-B2-B3-B4-C1-C2-C3-C4-D2-D3-D4



Dental Disposable

Dental Model Wax (Base Plate Wax)

- Imported American Raw wax, excellent flexibility and plasticity without bad smell optimum tenacity and pliability, uniform in colour and smooth in texture
- Type: medium type, hard type
- Packing: 250g/145*75*1.6cm
500g/170*90*2.2cm
denture base plate wax 20pcs/box
bite wax 250g/box Red/Yellow/Green



Zinc-Oxide/Eugenol Cement

- A traditional Zinc-Oxide/Eugenol Cement, mainly composed of eugenol and top-grade zinc-oxide, and used as indirect pulp capping, temporary seal, temporary cementation
- Package: 2*10g powder 7.5ml (liquid)/box



Eugenol

- A traditional dental drug and with very long history of clinical application
- Use high quality eugenol as raw materials its purity >95%
- Package: 20ml/bottle



Alginate Impression Material

- Fast setting chromatic alginate with tropical flavour
Indicated for removable protheses, study models, antagonists in fixed and removable protheses
- Fast water absorption
- Easy raxing
- Homogenous mass, smooth, compact surfaces
- Long impression storage



Dental Disposable

Dental Bib



- Size: 13" x18"(33cmx45.5cm)
- Material:1 PE film+2-ply paper
- Color: as customer required
- Wt/m² -PE: 14g 2-ply
- Paper: 17g+17g
- Packing: 500pcs/carton

Dental Apron



- Size: 39cmx50cm
- Material: 1 PE film+ 1ply paper
- Color: as customer required
- Wt/m² -PE:18g
- Paper: 22g
- Packing: 500pcs/carton

Dental Bib Clip

- Colorful: gold, rose, pink, green, blue
- New design stainless steel autoclavable
- It can resist high temperature
- Package: 100pcs/bag



Neaten Cases

- DKA-801016
- Size: 152*134*205mm
- Material: PP
- Color: white, yellow, black, blue, rose, orange
- Packing: 50sets/ctn
- Weight: 7kg
- Carton: 450*330*300mm



Cotton Roll

- 100% absorbent cotton
- More soft, more absorbency
- Available in multiple package; non-sterile and sterile
- To comply with USP, BP, EP etc

- Description
 - 8X25mm.....50pcs/bundle, 40bundles/box, 10boxes/ctn
 - 10X30mm.....50pcs/bundle, 40bundles/box, 10boxes/ctn
 - 10X38mm.....50pcs/bundle, 40bundles/box, 10boxes/ctn
 - L 1-1/2"X1/2".....50pcs/bundle, 40bundles/box, 10boxes/ctn
 - M 1-1/2"X3/8".....50pcs/bundle, 40bundles/box, 10boxes/ctn
 - S 1-1/2"X5/16".....50pcs/bundle, 40bundles/box, 10boxes/ctn



Dental Disposable

Silicone Small Bowls

Model: XL: DKA-X-124, L: DKA-X-125, M: DKA-X-126, S: DKA-X-127, SS: DKA-X-128

Resistant to the high temperature of 135. Flexible silicone rubber materials. Five different sizes to fit your different jobs
Washable for repeated use. Sucker cup bottom, with easy to put the bowls firmly on the smooth surface as glass, etc

- Size: 70*55mm (XL) 50*40mm (L) 36*38mm (M) 31*23mm (S) 25*25mm (SS)
- Material: SILICONE
- Packing/Weight: (XL) 1pc/box 144pcs/ctn/6kg
(L) 12pcs/box 25boxes/ctn/6kg
(M) 12pcs/box 56boxes/ctn/8.4kg
(S) 12pcs/box 120boxes/ctn/7.9kg
(SS) 12pcs/box 144boxes/ctn/7.5kg
- Carton: 480*275*300mm



Protective Series



X-ray Sensors Cover

- Size: 2-1/2" *10" *2.4c
8" *1-5/8" *2c
8" *1-3/8" *2c
- Packing: 500pcs/box 36boxes/ctn
- Carton: 50*32*31/32*31*26cm



Half Chair Cover

- Size: 27-1/2" *24" *1.7c
32" *32" *1.7c
- Packing: 225pcs/box 3boxes/ctn
- Carton: 44.5*32.2*21.5cm



Full Chair Cover

- | Size: | Packing: | Carton |
|-----------------|-----------------------|----------------|
| 29" *80" *2c | 125pcs/box 3boxes/ctn | 44.5*32.2*21.5 |
| 48" *56" *2c | 150pcs/box 3boxes/ctn | 52*33*24 |
| 29" *80" *1.34c | 125pcs/box 3boxes/ctn | 44.5*32.2*21.5 |

Sterilization Cassettes



C10

- Small cassettes (10pcs) kit
- Size: 14*20.3* 3.2 cm
- Colors: yellow, blue, green, red



C20

- Large cassettes (20pcs) kit
- Size: 28*20.3*3.2 cm
- Colors: yellow, blue, green, red



C25

- Oral surgery cassettes (25pcs) kit
- Size: 36.8*20.3*3.2 cm
- Colors: yellow, blue, green, red



C05S

- Simple exam cassettes (10pcs) kit
- Size: 18*6*2.2 cm
- Colors: yellow, blue, green, red



C05M

- Simple exam cassettes (5pcs) (seal)
- Size: 18*6*2.2 cm
- Colors: yellow, blue, green, red



C10S

- Simple small cassettes (10pcs) kit
- Size: 18*12*2.2 cm
- Colors: yellow, blue, green, red

Dental Burs

Diamond Bur

Advantages

1. Strictly comply with ISO Standard ;
2. Sharper and More Efficient ;
3. Durable and Valuable ;
4. Full Range of shapes and grits.
5. Fastly develop new items.
6. Individual Design and OEM Service












































































Grit

















































































- Black / Super Coarse
- Green / Coarse
- Blue / Medium
- Red / Fine
- Yellow / Extra Fine

Standard	001/000 0.8/19.0 BR-49	001/010 1.0/19.0 BR-45	001/012 1.2/19.0 BR-46	001/014 1.4/19.0 BR-41	001/016 1.6/19.0 BR-40	001/018 1.8/19.0 BR-31	001/021 2.0/19.0 BR-28	001/023 2.3/19.0 BR-26	001/025 2.5/19.0 BR-25	001/029 2.9/19.0 BR-23	002/012 2.3/19.0 BC-43	002/014 2.3/19.0 BC-42	
Spec. FG-	001-000M	001-010M	001-012M	001-014M	001-016M	001-018M	001-021M	001-023M	001-025M	001-029M	002-012M	002-014M	
Round /BR							Round with Collar /BC						
	002/016 3.5/19.0 BC-32	002/018 2.3/19.0 BC-31	010/010 1.0/19.0 SI-45	010/012 1.2/19.0 SI-46	010/014 1.6/19.0 SI-47	010/016 1.8/19.0 SI-48	019/010 2.3/19.0 DI-41	019/014 3.2/19.0 DI-42	030/032 5.0/19.0 EX-11	039/035 7.0/20.0 EX-12	041/025 0.5/19.0 WF-30	042/040 2.0/19.0 WR-45	042/050 2.0/19.0 WR-46
	002-016M	002-018M	010-010M	010-012M	010-014M	010-016M	019-010M	019-014M	030-032M	039-035M	041-025M	042-040M	042-050M
Inverted Cone /SI	Inverted Cone with Collar /DI						Barrel / EX			Wheel / WF, WR			
	055/045 2.0/19.0 WR-44	068/042 1.8/19.0 WR-13	109/010 4.0/19.0 SF-41	109/012 4.0/19.0 SF-31	109/014 4.0/19.0 SF-42	110/014 6.0/21.0 SF-21	110/016 6.0/21.0 SF-15	111/012 8.0/22.0 SF-11	111/014 8.0/22.0 SF-12	111/016 8.0/22.0 SF-13	138/010 4.0/19.0 SR-41	138/012 4.0/19.0 SR-31	138/014 4.0/19.0 SR-42
	055-045M	068-042M	109-010M	109-012M	109-014M	110-014M	110-016M	111-012M	111-014M	111-016M	138-010M	138-012M	138-014M
Flat End Cylinder /SF							Round End Cylinder /SR						
	140/014 6.0/21.0 SR-21	141/012 8.0/22.0 SR-11	141/014 8.0/22.0 SR-12	141/016 8.0/22.0 SR-13	150/012 10.0/21.0 EX-18	164/012 6.0/21.0 TC-26	165/014 8.0/22.0 TC-21	166/010 10.0/23.0 TC-27	166/012 10.0/23.0 TC-28	166/014 10.0/22.0 TC-10	166/016 10.0/22.0 TC-11	166/018 10.0/23.0 TC-16	169/010 4.0/19.0 TF-41
	140-014M	141-012M	141-014M	141-016M	150-012M	164-012M	165-014M	166-010M	166-012M	166-014M	166-016M	166-018M	169-010M
End Cut /EX	Needle /TC						Flat Cone /TF						
	170/012 4.0/19.0 TF-42	170/014 4.0/19.0 TF-43	170/016 4.0/19.0 TF-31	170/018 5.0/20.0 TF-23	170/021 5.0/20.0 TF-22	171/014 6.5/21.0 TF-20	171/016 6.5/21.0 TF-21	172/010 8.0/22.0 TF-07	172/012 8.0/22.0 TF-08	172/014 8.0/22.0 TF-09	172/016 8.0/22.0 TF-10	172/018 8.0/22.0 TF-56	172/023 9.0/22.0 TF-14
	170-012M	170-014M	170-016M	170-018M	170-021M	171-014M	171-016M	172-010M	172-012M	172-014M	172-016M	172-018M	172-023M
	173/014 10.0/24.0 TF-11	173/016 10.0/22.5 TF-12	173/018 10.0/22.5 TF-13	196/010 4.0/19.0 CR-41	196/012 4.0/19.0 CR-31	196/014 4.0/19.0 CR-42	196/016 4.0/19.0 CR-12	196/020 5.0/19.0 CR-11	197/014 6.5/21.0 TR-20	197/016 6.5/21.0 TR-21	197/018 6.5/21.0 TR-62	197/020 6.5/21.0 TR-63	198/014 8.0/22.0 TR-25
	173-014M	173-016M	173-018M	196-010M	196-012M	196-014M	196-016M	196-020M	197-014M	197-016M	197-018M	197-020M	198-014M


Dental Burs

Round End Cone /CR, TR												
												
198/016 8.0/22.0	198/018 8.0/22.0	199/014 10.0/22.0	199/016 10.0/22.0	199/018 9.0/22.0	199/022 9.0/22.0	200/022 11.0/24.0	200/024 11.0/24.0	225/014 4.0/19.0	225/018 5.0/19.0	233/010 2.8/19.0	234/014 4.0/19.0	237/018 5.0/19.0
TR-24	TR-23	TR-11	TR-12	TR-13	TR-14	TR-15	TR-19	SI-50	SI-51	EX-41	EX-31	EX-20
198-016M	198-018M	199-014M	199-016M	199-018M	199-022M	200-022M	200-024M	225-014M	225-018M	233-010M	234-014M	237-018M
Inverted Cone /SI						Pearl /EX						
												
237/021 5.0/19.0	237/032 5.0/19.0	248/012 6.0/21.0	248/014 6.0/21.0	249/014 8.0/22.0	249/016 8.0/22.0	250/012 10.0/24.0	250/014 10.0/24.0	250/016 10.0/24.0	257/018 3.6/19.0	257/023 5.0/19.0	257/028 5.0/19.0	257/032 5.0/19.0
EX-21	EX-26	FO-41	FO-20	FO-21	FO-22	FO-11	FO-12	FO-13	FO-32	FO-34	FO-25	FO-27
237-021M	237-032M	248-012M	248-014M	249-014M	249-016M	250-012M	250-014M	250-016M	257-018M	257-023M	257-028M	257-032M
Flame /FO												
												
277/020 3.9/19.0	277/030 5.0/19.0	288/012 6.0/21.0	289/014 6.0/21.0	298/016 8.0/22.0	298/018 8.0/22.0	299/016 10.0/24.0	304/023 1.0/19.0	304/038 1.2/19.0	304/050 1.8/19.0	515/014 8.0/22.0	519/016 4.0/22.0	005/018 7.5/21.0
TR-22	TR-28	SO-20	SO-21	B7BK16	B7BK18	B79K16	WR-47	WR-48	WR-49	BC-11	BC-12	EX-28
277-020M	277-030M	288-012M	289-014M	298-016M	298-018M	299-016M	304-023M	304-038M	304-050M	515-014M	519-016M	005-018M
Football /TR			Torpedo /SO			Wheel /WR			Gross Reduction /BC			
												
552/016 6.0/21.0	552/018 6.0/21.0	552/021 6.0/21.0	546/016 8.0/22.0	553/018 10.0/24.0								
VP-20	VP-21	VP-22	B47KR16	B48KR18								
552-016M	552-018M	552-021M	546-016M	553-018M								
Depth Marking			Taper Round edge									
Super Coarse												
	001/014 1.4/19.0	001/016 1.4/19.0	001/018 1.8/19.0	001/020 2.0/19.0	010/016 1.8/19.0	038/032 5.0/19.0	039/035 7.0/20.0	109/012 4.0/19.0	109/014 4.0/19.0	111/012 8.0/22.0	111/014 8.0/22.0	111/016 8.0/22.0
Spec. FG-	BR-415	BR-405	BR-315	BR-285	SI-485	EX-115	EX-125	SF-315	SF-425	SF-115	SF-125	SF-135
	001-014S	001-016S	001-018S	001-020S	010-016S	038-032S	039-035S	109-012S	109-014S	111-012S	111-014S	111-016S
												
166/016 10.0/22.0	166/018 10.0/22.0	171/016 6.5/21.0	173/014 10.0/24.0	173/016 10.0/22.0	173/018 10.0/22.0	197/016 6.5/21.0	199/014 10.0/22.0	199/016 10.0/22.0	199/018 9.0/22.0	237/018 5.0/19.0	277/020 3.9/19.0	198/016 8.0/20.5
TC-115	TC-165	TF-215	TF-115	TF-125	TF-135	TR-215	TR-115	TR-125	TR-135	EX-205	TR-225	
166-016S	166-018S	171-016S	173-014S	173-016S	173-018S	197-016S	199-014S	199-016S	199-018S	237-018S	277-020S	198C-016S
												
198/021 8.0/19.0	508/014 8.0/21.5	508/016 9.0/21.5	508/021 9.0/20.0									
198C-021S	508T-014S	508T-016S	508T-021S									

Dental Burs

Coarse	 001/018 1.8/19.0 BR-31C	 010/014 1.4/19.0 SI-47C	 048/042 1.8/19.0 WR-13C	 111/014 8.0/22.0 SF-12C	 165/014 8.0/22.0 TC-21C	 173/018 10.0/22.0 TF-13C	 190/018 9.5/21.0 FO-54C	 197/018 6.5/21.0 TR-62C	 199/018 9.0/22.0 TR-13C	 257/018 3.6/19.0 FO-32C		
Spec. FG-	001-018C	010-014C	048-042C	111-014C	165-014C	173-018C	190-018C	197-018C	199-018C	257-018C		
Fine	 001/008 0.8/19.0 BR-49F	 110/014 6.0/21.0 SF-21F	 150/012 10.0/21.0 EX-10F	 165/014 8.0/22.0 TC-21F	 166/016 10.0/22.0 TC-11F	 171/016 6.5/21.0 TF-21F	 173/014 10.0/24.0 TF-11F	 173/016 10.0/22.0 TF-12F	 173/018 10.0/22.0 TF-13F	 196/016 4.0/19.0 CR-12F	 196/020 5.0/19.0 CR-11F	 197/014 6.5/21.0 TR-20F
Spec. FG-	001-008F	110-014F	150-012F	165-014F	166-016F	171-016F	173-014F	173-016F	173-018F	196-016F	196-020F	197-014F
 197/016 6.5/21.0 TR-21F	 197/018 6.5/21.0 TR-62F	 199/014 10.0/22.0 TR-11F	 199/016 10.0/22.0 TR-12F	 199/018 9.0/22.0 TR-13F	 234/014 4.0/19.0 EX-31F	 237/021 5.0/19.0 EX-21F	 249/014 8.0/22.0 FO-21F	 249/016 8.0/22.0 FO-22F	 254/016 3.2/19.0 FO-30F	 289/014 8.0/22.0 SO-21F		
197-016F	197-018F	199-014F	199-016F	199-018F	234-014F	237-021F	249-014F	249-016F	254-016F	289-014F		
FG Short For Kids	 001/006 0.6/16.8 CD-50F	 138/007 2.2/16.8 CD-51F	 139/007 3.8/16.8 CD-52F	 161/007 2.2/16.8 CD-53F	 246/006 2.2/16.8 CD-54F	 254/009 1.2/16.8 CD-55F	 246/007 2.2/16.8 CD-56F	 247/007 3.6/16.8 CD-57F	 108/008 3.2/16.8 CD-58F	 171/013 6.9/16.8 CD-59F		
Spec. FG-	001-5006F	138-5007F	139-5007F	161-5007F	246-5006F	254-5009F	246-5007F	247-5007F	108-5008F	171-5013F		
Fine Grit / Red												
Extra Fine	 ISO 001/016 1.6/19.0 BR-40EF	 165/014 8.0/22.0 TC-21EF	 166/010 10.0/23.0 TC-27EF	 166/012 10.0/23.0 TC-28EF	 166/016 10.0/22.0 TC-11EF	 171/016 6.5/21.0 TF-21EF	 173/014 10.0/24.0 TF-11EF	 173/016 10.0/22.0 TF-12EF	 173/018 10.0/22.0 TF-13EF	 196/016 4.0/19.0 CR-12EF	 196/020 5.0/19.0 CR-11EF	 197/016 6.5/21.0 TR-21EF
Spec. FG-	001-016EF	165-014EF	166-010EF	166-012EF	166-016EF	171-016EF	173-014EF	173-016EF	173-018EF	196-016EF	196-020EF	197-016EF
 197/018 6.5/21.0 TR-62EF	 198/016 8.0/22.0 TR-24EF	 199/014 10.0/22.0 TR-11EF	 199/016 10.0/22.0 TR-12EF	 199/018 9.0/22.0 TR-13EF	 237/021 5.0/19.0 EX-21EF	 243/010 4.3/23.5 FO-40EF	 248/012 6.0/21.0 FO-41EF	 248/014 6.0/21.0 FO-20EF	 249/014 8.0/22.0 FO-21EF	 249/016 8.0/22.0 FO-22EF	 254/016 3.2/19.0 FO-30EF	 257/023 5.0/19.0 FO-34EF
197-018EF	198-016EF	199-014EF	199-016EF	199-018EF	237-021EF	243-010EF	248-012EF	248-014EF	249-014EF	249-016EF	254-016EF	257-023EF
FG Short	 001/010 1.0/16.0 BR-54S	 001/014 1.4/16.0 BR-54I	 010/012 1.2/16.0 SI-546	 010/016 1.8/16.0 SI-548	 138/012 3.0/16.0 SR-53I	 165/014 8.0/19.0 TC-52I	 169/010 3.5/16.0 TF-54I	 170/016 4.0/16.0 TF-53I	 170/018 5.0/18.0 TF-523	 171/014 6.5/18.0 TF-520	 197/016 6.5/17.0 TR-52I	 249/014 8.0/19.0 FO-52I
Spec. FG-	001-S010M	001-S014M	010-S012M	010-S016M	138-S012M	165-S014M	169-S010M	170-S016M	170-S018M	171-S014M	197-S016M	249-S014M

Dental Burs

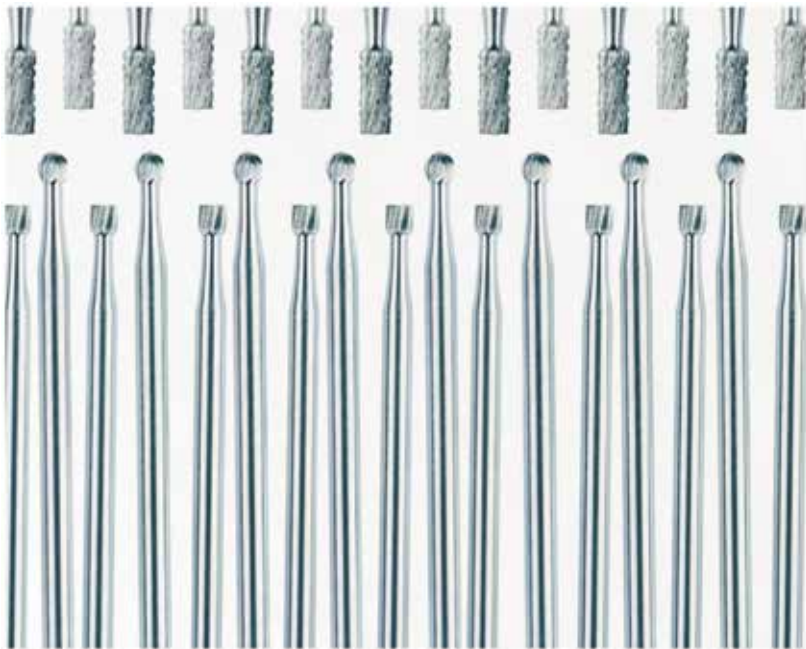

Specification	Diameter	Length
FG(Friction Grip) 	1.60mm	19.0mm
SS(FG Short Shank) 	1.60mm	16.0mm
FG SL(FG Surgical Length) 	1.60mm	25.0mm
RA(Right Angle) 	2.35mm	22.5mm
RA SL(RA Surgical Length) 	2.35mm	25.0mm
HP(Handpiece) 	2.35mm	44.5mm

Handpiece Carbide Burs (Laboratory)



HEAD(SPHERICAL)													
US NO.	ISO NO.	1/2	1	2	3	4	5	6	7	8	9	10	11
HP	500104001001	006	008	010	012	014	016	018	021	023	025	027	31



HEAD (INVERTED,TRUNCATED CONICAL)												
US NO.	ISO NO.	34	35	36	37	38	39	40	41			
HP	500104010001				008	010	012	014	016	018	021	023



HEAD (CYLINDRICAL)									
US NO.	ISO NO.	56	57	58	59	60	61	62	63
HP	500104107006	008	010	012	014	016	018	021	023













STRAIGHT FISSURE HEAD (CYLINDRICAL) & LONG HEAD														
US NO.	ISO NO.	556	556L	557	557L	558	558L	559	559L	560	560L	561	562	563
HP	500104107007	008	—	010	—	012	—	014	—	016	—	018	021	023
HPL	500104110007	—	008	—	010	—	012	—	014	—	016	—	—	—












TAPERED FISSURE HEAD (TRUNCATED CONICAL) & LONG HEAD												
US NO.	ISO NO.	699	699L	700	700L	701	701L	702	702L	703	703L	704
HP	500104168007	009	—	010	—	012	—	016	—	021	—	023
HPL	500104171007	—	009	—	010	—	012	—	016	—	021	—

High Speed Carbide Burs












HEAD(SPHERICAL)											
US NO.	ISO NO.	1/4	1/2	1	2	3	4	5	6	7	8
FG	500314001001	005	006	008	010	012	014	016	018	021	023








(INVERTED, TRUNCATED CONICAL)										
US NO.	ISO NO.	33 1/2	34	35	36	37	38	39	40	41
FG	500314010001	006	008	010	012	014	016	018	021	023














(HEMISPHERICAL, INVERTED CONICAL) & LONG HEAD										
US NO.	ISO NO.	329	330	330L	331	331L	332	332L	333	333L
FG	500314237001	006	008	—	010	—	012	—	014	—
FGL	500315238001	—	—	008	—	010	—	012	—	014



STRAIGHT FISSURE HEAD (CYLINDRICAL) & LONG HEAD													
US NO.	ISO NO.	54	55	56	56L	57	57L	58	58L	59	59L	60	60L
FG	500314107006	005	006	008	—	010	—	012	—	014	—	016	—
FGL	500316109006	—	—	—	008	—	010	—	012	—	014	—	016



STRAIGHT FISSURE HEAD (CYLINDRICAL) & LONG HEAD												
US NO.	ISO NO.	556	556L	557	557L	558	558L	559	559L	560	560L	561
FG	500314107007	008	—	010	—	012	—	014	—	016	—	018
FGL	500315109007	—	008	—	010	—	012	—	014	—	016	—



HEAD WITH ROUNDED END (HEMISPHERICAL, CYLINDRICAL)						
US NO.	ISO NO.	1156	1157	1158	1159	1160
FG	500314137006	008	010	012	014	016



HEAD WITH ROUNDED END (HEMISPHERICAL, CYLINDRICAL)				
US NO.	ISO NO.	244	245	246
FG	500314233006	006	010	012

High Speed Carbide Burs



FISSURE HEAD WITH ROUNDED END (HEMISPHERICAL, CYLINDRICAL) & LONG HEAD

US NO.	ISO NO.	1556	1557	1557L	1558	1558L	1559	1559L	1560	1560L
FG	500314137007	008	010	—	012	—	014	—	016	—
FGL	500315139007	—	—	010	—	012	—	014	—	016



TAPERED FISSURE HEAD & LONG HEAD

US NO.	ISO NO.	168	169	169L	170	170L	171	171L	172	172L
FG	500314168006	008	009	—	010	—	012	—	016	—
FGL	500315170006	—	—	009	—	010	—	012	—	016



TAPERED FISSURE HEAD (TRUNCATED CONICAL) & LONG HEAD

US NO.	ISO NO.	699	699L	700	700L	701	701L	702	702L	703
FG	500314168007	009	—	010	—	012	—	016	—	021
FGL	500315170007	—	009	—	010	—	012	—	016	—

Preclinical

Crown Prep.	FG 1957	FG 1958
Fine, Cross	137/010	137/012

Scaling Bur	Perio	
	009	

Scaling Bur	Flame	
	012	

Endo End Bur	Endo-Z	Endo-Z	Endo-Z	Endo-Z
	016	016	016	016

Extraction Bur	Zekrya	Zekrya	Zekrya	Zekrya

Low Speed Carbide Burs



HEAD(SPHERICAL)

US NO.	ISO NO.	1/2	1	2	3	4	5	6	7	8
RA	500204001001	006	008	010	012	014	016	018	021	023



(INVERTED,TRUNCATED CONICAL)

US NO.	ISO NO.	33 1/2	34	35	36	37	38	39	40	41
RA	500204010001	006	008	010	012	014	016	018	021	023



(HEMISPHERICAL,INVERTED CONICAL) & LONG HEAD

US NO.	ISO NO.	329	330	330L	331	331L	332	332L	333	333L
RA	500204237001	—	008	—	010	—	012	—	—	—
RAL	500315238001	—	—	—	—	010	—	012	—	014



STRAIGHT FISSURE HEAD (CYLINDRICAL) & LONG HEAD

US NO.	ISO NO.	55	56	56L	57	57L	58	58L	59	59L	60	60L	61	62	63
RA	500204107006	006	008	—	010	—	012	—	014	—	016	—	018	021	023
RAL	500204109006	—	—	009	—	010	—	012	—	014	—	016	—	—	—



STRAIGHT FISSURE HEAD (CYLINDRICAL) & LONG HEAD

US NO.	ISO NO.	556	556L	557	557L	558	558L	559	559L	560	560L	561	562	563
RA	500204107006	008	—	010	—	012	—	014	—	016	—	018	021	023
RAL	500315109007	—	008	—	010	—	012	—	014	—	016	—	—	—

Dental Burs

Low Speed Carbide Burs



FISSURE HEAD (TRUNCATED CONICAL) & LONG HEAD									
US NO.	ISO NO.	699	700	700L	701	701L	702	703	704
RA	500204168007	009	010	—	012	—	016	021	023
RAL	500204170007	—	—	010	—	012	—	—	—



FISSURE HEAD WITH ROUNDED END (HEMISPHERICAL, CYLINDRICAL) & LONG HEAD										
US NO.	ISO NO.	1556	1557	1557L	1558	1558L	1559	1559L	1560	1560L
RA	500204137007	008	010	—	012	—	014	—	016	—
RAL	500204139007	—	—	010	—	012	—	014	—	016

Stainless Steel Low Speed Burs



HEAD (SPHERICAL)									
US NO.	ISO NO.	2	3	4	5	6	7	8	
RA		010	012	014	016	018	021	023	






RA XL 30.0mm Implant use

Ball		
RA XL D10		1.0
RA XL D20		2.0
RA XL D30		3.0
RA XL D40		4.0
RA XL D50		5.0

HP XL 70.0mm Bone Surgical

Ball		
HP XL D10		1.0
HP XL D20		2.0
HP XL D40		4.0

Hartmetallfraser

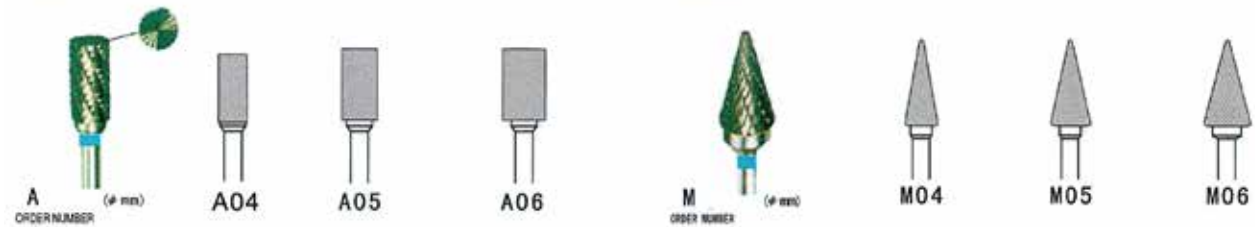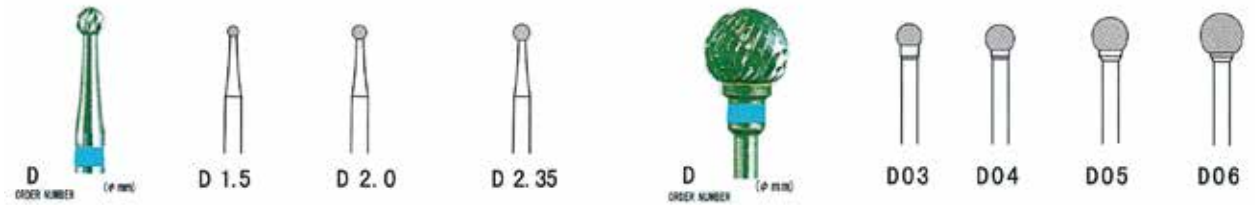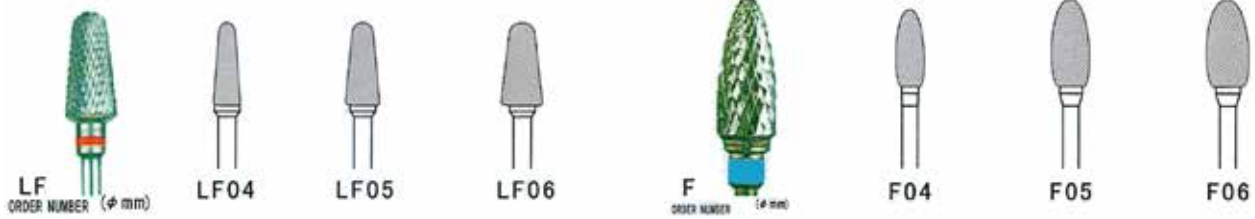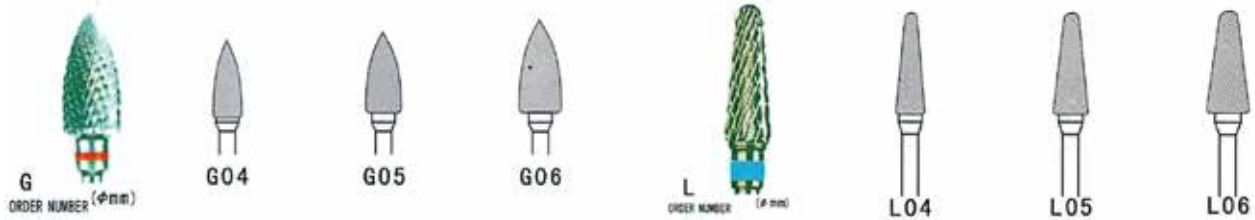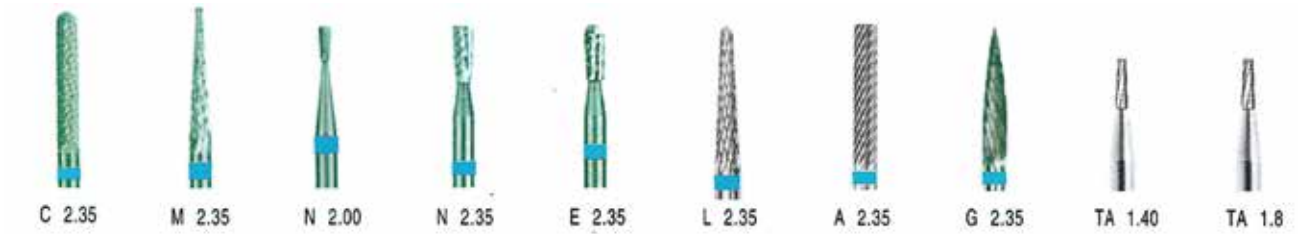


ITEM NO.	Description
22	X0.2mm
25	X0.7mm
35	X0.7mm
37.5	X0.7mm
35	X1.7mm
38	X0.6mm
38	X1.0mm
32	X1.6mm
40	X1.0mm


Sinter-diamond



Sinter-diamond & Acrylic Polisher

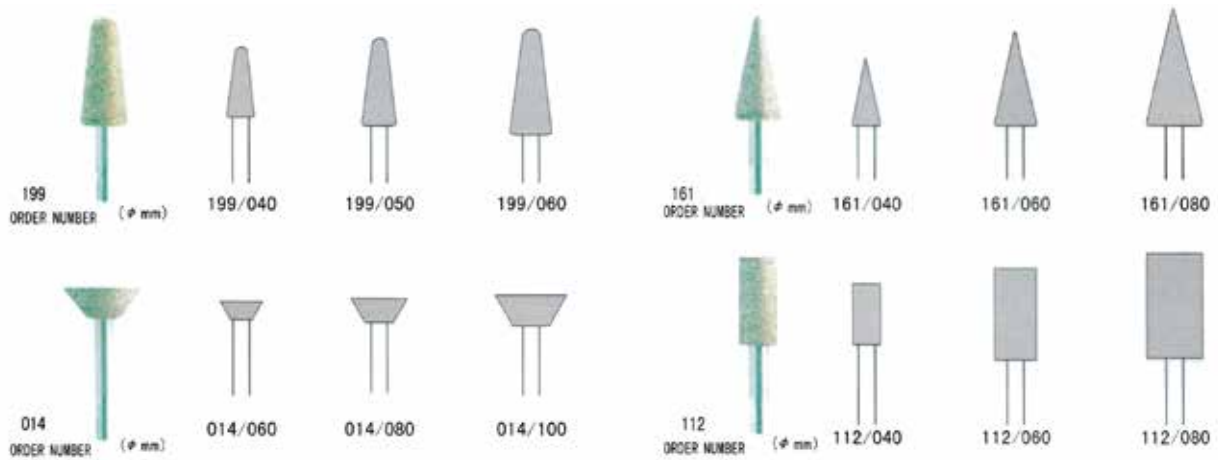

Acrylic Polishers

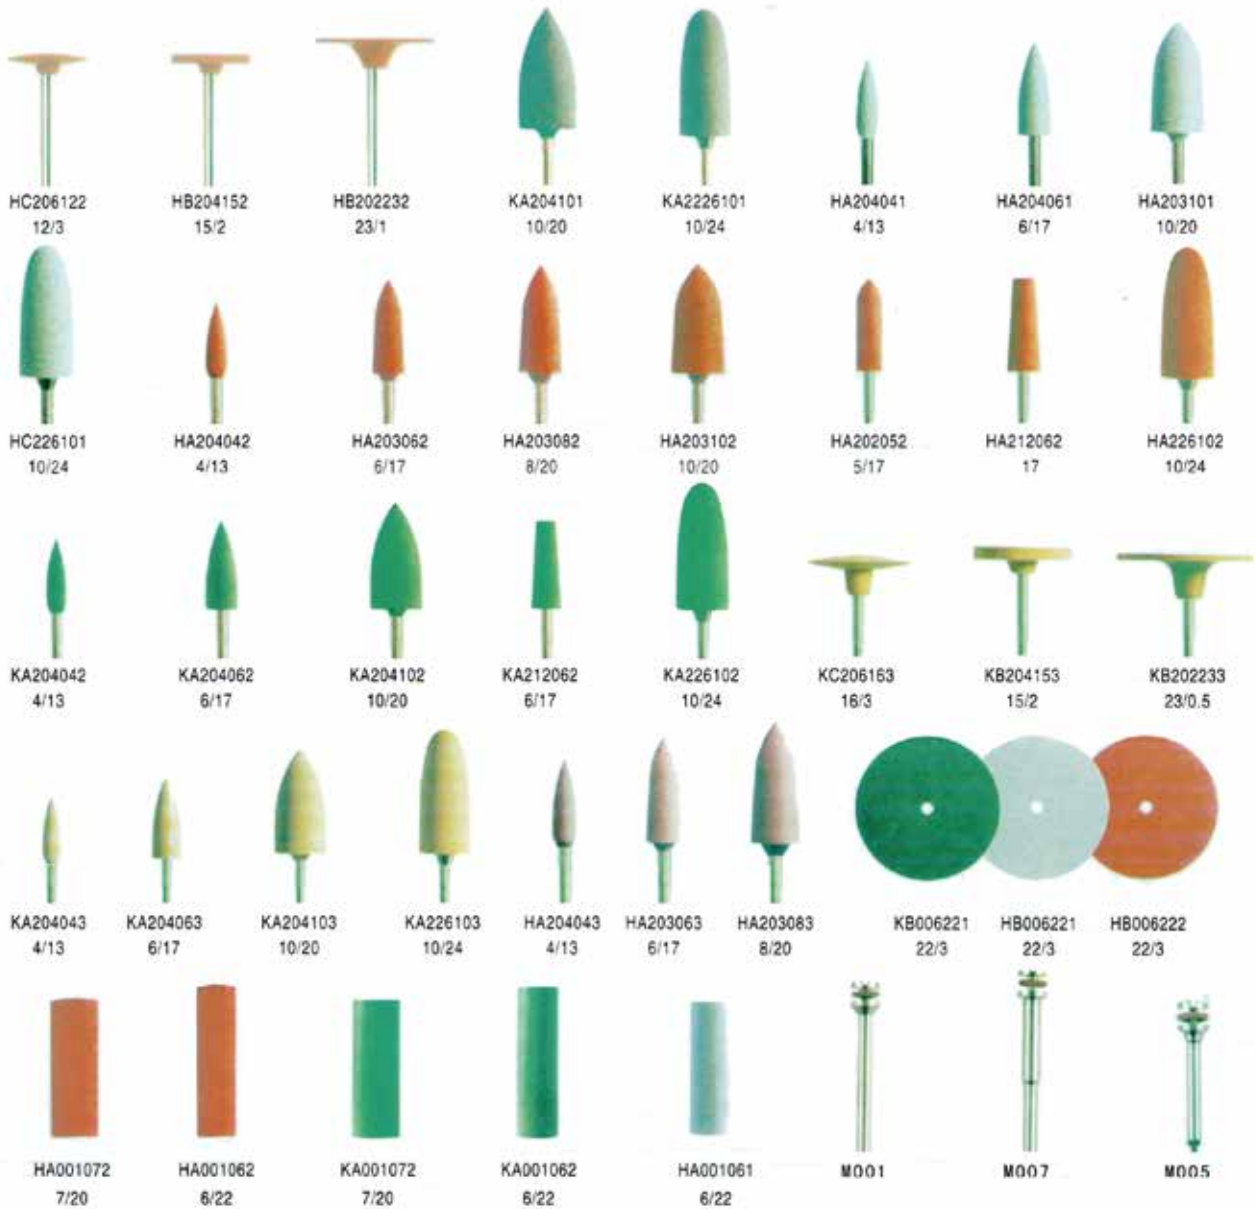

Brushes & Mounted Stone



GREEN MOUNTED STONE



PINK MOUNTED STONE



WHITE MOUNTED STONE




Diamond Disc

Doppelseitig-DOUBLE SIDED
DOUBLE FACE-DOS LADOS

C03

ORDER NO



C03/160


C03/190

C03/220

C03/240

C03/350

C03/400



Starke in mm-THICKNESS IN mm
EPAISSEUR EN MM-GROSOR EN mm

0.20mm

0.20mm

0.20mm

0.20mm

0.20mm

0.20mm

0.25mm

0.25mm

0.25mm

0.25mm

0.25mm

0.25mm

0.30mm

0.30mm

0.30mm

0.30mm

0.30mm

0.30mm

0.35mm

0.35mm

0.35mm

0.35mm


0.35mm

0.35mm

einseitig-ONE SIDED
UNE FACE-UN SOLO LADO

CC03

ORDER NO



Starke in mm-THICKNESS IN mm
EPAISSEUR EN MM-GROSOR EN mm

CC03/160

CC03/190

CC03/220

CC03/240

0.20mm

0.20mm

0.20mm

0.20mm

0.25mm

0.25mm

0.25mm

0.25mm

doppelseitig-DOUBLE SIDED
DOUBLE FACE-DOS LADOS

CM04

ORDER NO



CM04/160

CM04/190

CM04/220

CM04/240

CM04/350

CM04/400



Starke in mm-THICKNESS IN mm
EPAISSEUR EN MM-GROSOR EN mm

0.20mm

0.20mm

0.20mm

0.20mm

0.20mm

0.20mm

0.25mm

0.25mm

0.25mm

0.25mm

0.25mm

0.25mm

0.30mm

0.30mm

0.30mm

0.30mm

0.30mm

0.30mm

0.35mm

0.35mm

0.35mm

0.35mm

0.35mm

0.35mm

Diamond Disc

Doppelseitig · DOUBLE SIDED
DOUBLE FACE · DOS LADOS

ORDER NO **C06**



C06/190

C06/220

C06/240

C06/350

C06/400



Starke in mm · THICKNESS IN mm
EPAISSEUR EN MM · GROSOR EN mm

0.20mm	0.20mm	0.20mm	0.20mm	0.20mm
0.25mm	0.25mm	0.25mm	0.25mm	0.25mm
0.30mm	0.30mm	0.30mm	0.30mm	0.30mm
0.35mm	0.35mm	0.35mm	0.35mm	0.35mm

doppelseitig · DOUBLE SIDED
DOUBLE FACE · DOS LADOS


ORDER NO **CM06**



CM06/190

CM06/220

CM06/240



Starke in mm · THICKNESS IN mm
EPAISSEUR EN MM · GROSOR EN mm

0.20mm	0.20mm	0.20mm
0.25mm	0.25mm	0.25mm
0.30mm	0.30mm	0.30mm
0.35mm	0.35mm	0.35mm

doppelseitig · DOUBLE SIDED
DOUBLE FACE · DOS LADOS

ORDER NO **C07**



C07/190

C07/220

C07/240

C07/350

C07/400




Starke in mm · THICKNESS IN mm
EPAISSEUR EN MM · GROSOR EN mm


0.20mm	0.20mm	0.20mm	0.20mm	0.20mm
0.25mm	0.25mm	0.25mm	0.25mm	0.25mm
0.30mm	0.30mm	0.30mm	0.30mm	0.30mm
0.35mm	0.35mm	0.35mm	0.35mm	0.35mm

Dental Instruments


Periodontal probe

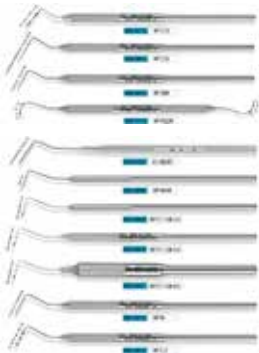


Explorers

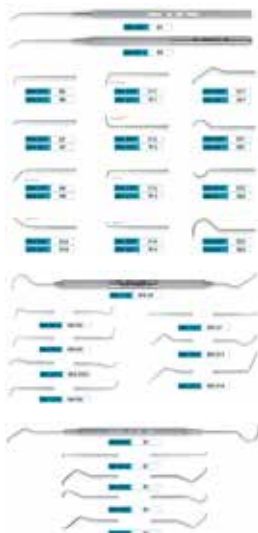

Scalers

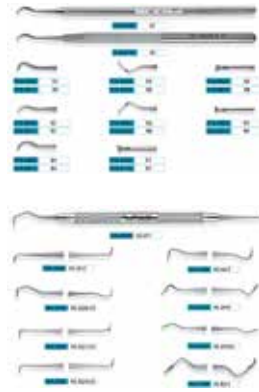


Spreaders



Excavators




Periodontal files



Root-canal pluggers



Forceps for adults

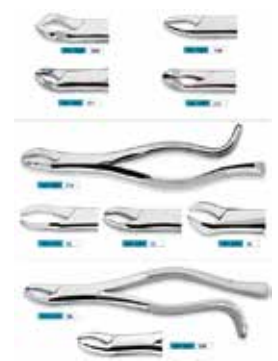


Apical elevators




Plaster spatulas




Forceps for children



Laboratory pliers



Pluggers/Condensers



Pluggers/Condensers



Mouth mirrors & Mouth mirrors handle



CODE	Size	Description
041-1103	4#	Plane
041-1203	4#	Magnifying
041-1303	4#	Anti-heat plain
041-1403	4#	Anti-heat Magnifying
041-2103	5#	Plane
041-2203	5#	Magnifying
041-2303	5#	Anti-heat plain
041-2403	5#	Anti-heat plain Magnifying

Cotton & Dressing pliers




090-0100	-Single fold without pin
090-0101	-Single fold with pin
090-0200	-Double fold without pin
090-0201	-Double fold with pin

Palatal bars



Lingual bars





SHANGHAI JPS MEDICAL CO., LTD



WeChat

Add: C1506, No.519, Qifan Rd, Pudong, Shanghai, China

Email: info@jpsdental.com Web: www.jpsdental.com

Mob/WhatsApp/Wechat: 0086 138 1688 2655 **Peter Tan**