


■ GZD-58 (JZ-58) 58pins Secondary Plug and Socket

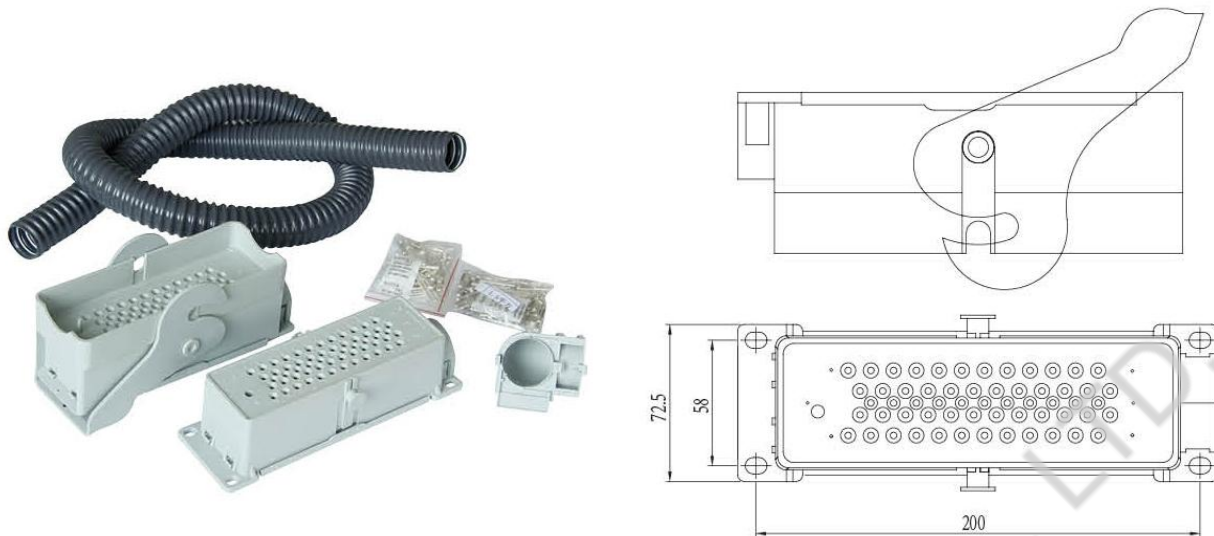

Usage: GZD-58 secondary plug and socket is used to connect the secondary circuit of GZS1 (with VS1, VD4) and other middle-set high voltage switchgear.


Rated voltage: AC380V, DC220V;

Rated current: AC16A, DC10A;

Mechanical life: 2000 times.

Note: The pins for plug and socket, and the wiring hole of the jack are limited to use wires $\leq 1.5\text{mm}^2$; if need 2.5mm^2 or 4mm^2 , please specify when ordering.

■ CD-64 64pins Secondary Plug and Socket

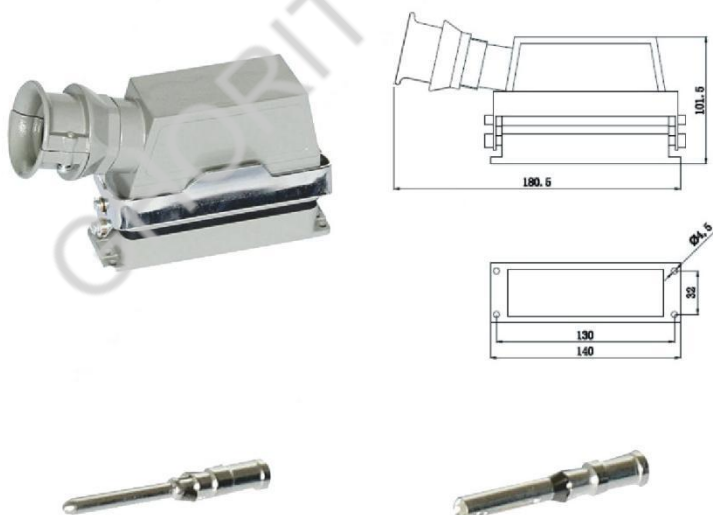


Rated voltage: AC380V, DC220V

Rated current: AC16A, DC10A

Mechanical life: 2000 times

■ FK10-I-□□ Auxiliary Switch

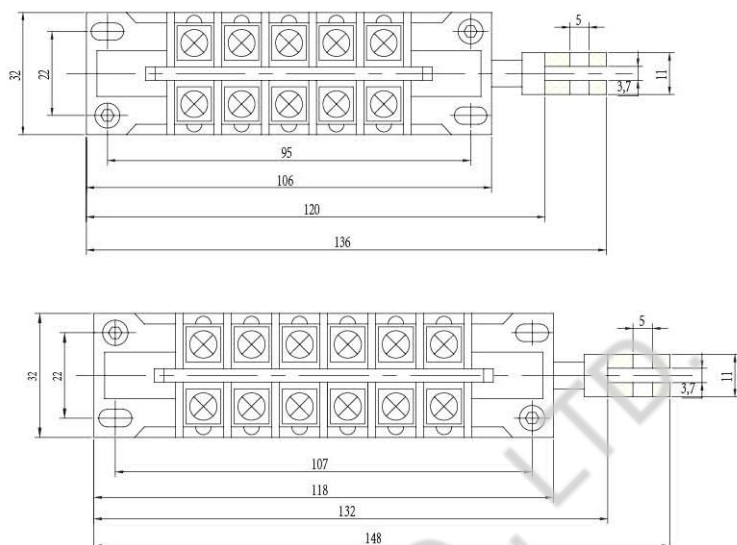


Rated voltage: AC660V

Rated frequency: 50Hz

Rated current: 15A

Note: With joint of the connecting bar (for chassis truck S8 and S9)

■ FK10-II-□□ Auxiliary Switch

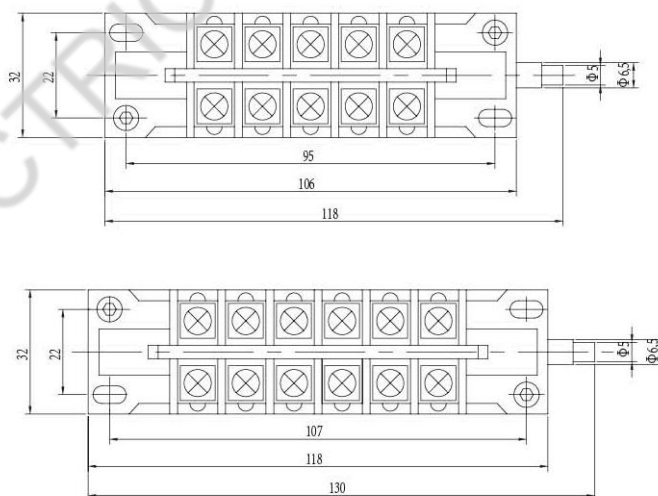


Rated voltage: AC660V

Rated frequency: 50Hz

Rated current: 15A


Note: Without joint of the connecting bar (for earth switch interlock)

■ CM1 Busbar Holder -15 (4-6mm wire type)

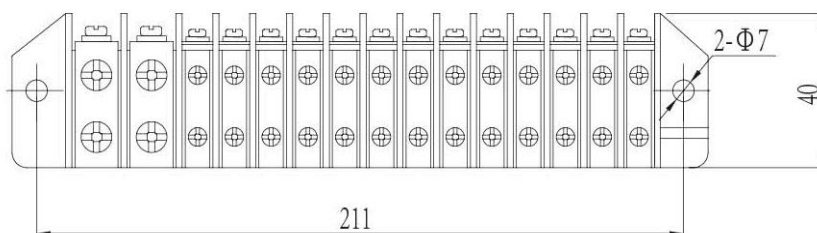


Note: Please specify the section number and mounting hole size when ordering.

■ MJ1 Busbar Holder (Ø8 copper rod type)

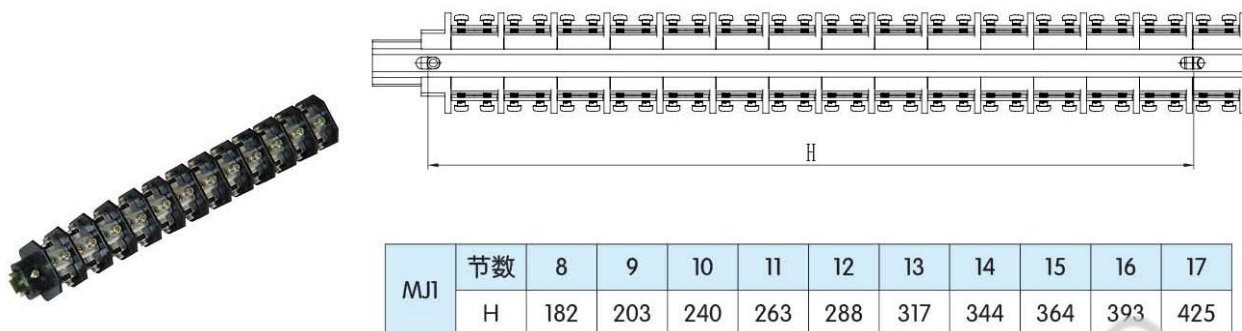


Note: Please specify the section number and mounting hole size when ordering.

■ MJ2 Busbar Holder (Ø6 copper rod type)

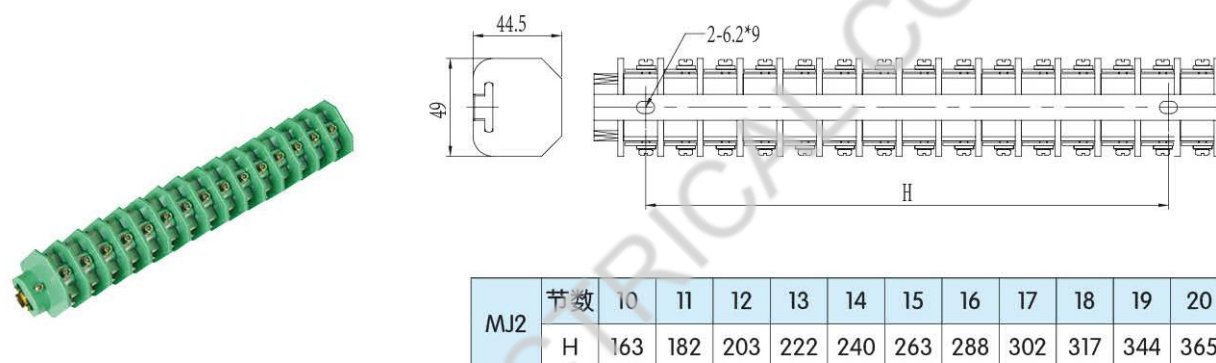

Note: Please specify the section number and mounting hole size when ordering.

■ Heater

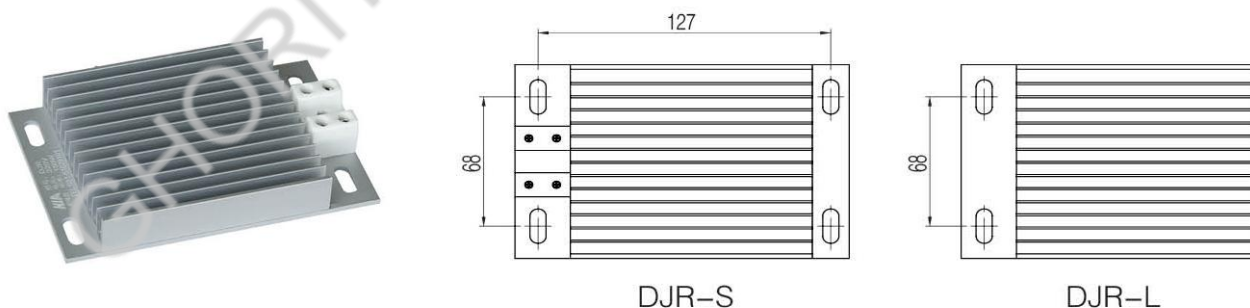


DJR- type aluminum alloy comb heater is a new electric heater specially designed for moisture-proof and dehumidification of electric equipment. The heater is composed of a special aluminum alloy heat sink profile and high-quality alloy heating wire. It has the characteristics of small size, beautiful appearance, uniform heat dissipation, fast heat conduction, and large heat dissipation area, so as to ensure that the service life of the heating wire is much longer than that of the ordinary tubular heater and can work reliably for a long time.

Operating voltage: AC220V



Rated power: 50~500W \pm 5%

■ DSN-BM(Z/Y) Indoor Electromagnetic Lock

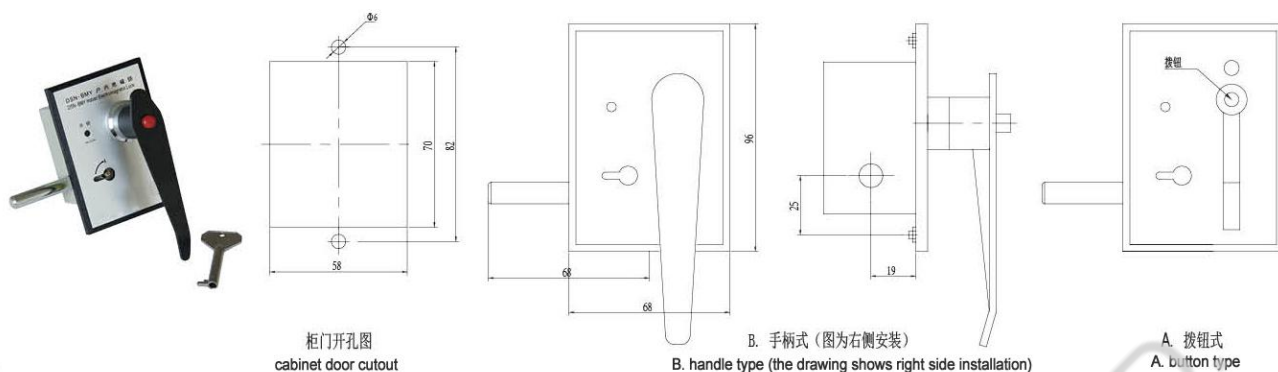


Model	Rated voltage	Rated current	Rated power	Hole size on cabinet door	Mounting size on cabinet door	Lock travel	Remarks
DSN-AMZ	AC220V DC220V DC110V	100mA	<3VA	56mm×70mm	Ø6×82mm	14mm	A new type of electromagnet structure is adopted to make the coils of three voltage levels common.
DSN-AMY		196mA	<50W				
DSN-BMZ		98mA	<12W				
DSN-BMY							
DSN-AMZ6	DC6V	400mA	<2.5W	56mm×70mm	Ø6×82mm	14mm	It is designed to be used in conjunction with our factory's uninterrupted DC power supply. It is suitable for places where there is no secondary operation power supply during on-site maintenance and improves the product's anti-error performance.
DSN-AMY6							
DSN-BMZ6							
DSN-BMY6							

■ Latching Electromagnet

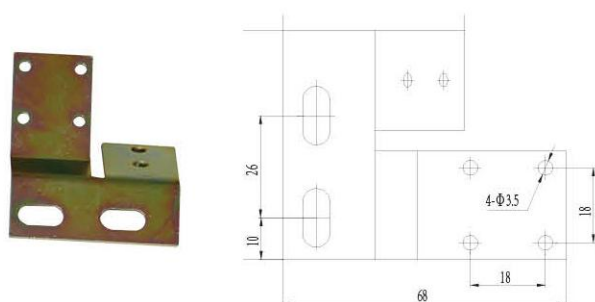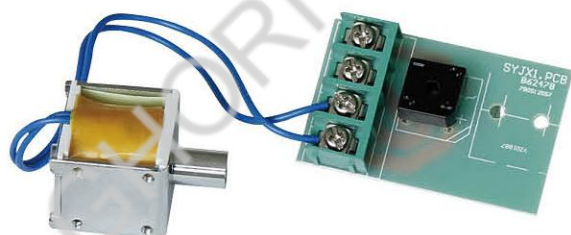

订货时请注明: 交流 AC110V,220V. 直流 AC110V,220V
When ordering: Please specify the voltage, AC 110, AC220V, DC110V, DC220V.

■ Cabinet Light



柜体开孔尺寸 cabinet cutout


■ Rubber Retainer



安装在柜体顶部或底部，方便进出线用，同时对电缆起到防护作用
Used in the top or bottom of cabinet for the cables pass in and out, also can protect cables well.

8LS 766 003P3	扁型橡皮圈 (53 × 13) Flat rubber retainer(53 × 13)
8LS 766 022	橡皮护圈 (φ 62) Rubber retainer(φ 62)
8LS 766 055.1	橡皮护圈 (φ 80, 塔型) Rubber retainer(φ 80, tower type)
8LS 766 004	橡皮护圈 (φ 90) Rubber retainer(φ 90)
8LS 766 005	橡皮护圈 (φ 110, 塔型) Rubber retainer(φ 110, tower type)

■ Cable Clamp

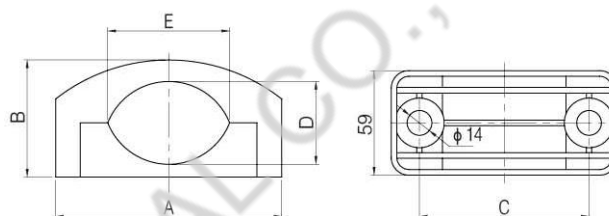

型号 Type	A	B	C	D	E	备注 Remarks
(30-52)mm ²	110	49.5	75	32.7	48	小号 Small
(50-70)mm ²	114.5	52.6	83.5	36	57	中号 Medium
(70-95)mm ²	128	66	96	46.7	69	大号 Big
(90-120)mm ²	150	55	120	65	95	加大 Bigger

■ Transfer Trolley



Please confirm the width when ordering.

■ VS1 Parts



Motor



Counter



Microswitch



Opening/closing coil



Overcurrent coil



Circuit board



Oil buffer



Auxiliary switch

■ Removal Tools for Connector



TL00, removal tool for HD/HDD series connector 10A pins



TL01, removal tool for HE/HEE series connector 16A pins



removal tool for GZD-58 (JZ-58) connector

■ Heavy Duty Connector Crimping Tools A-0540HX



Specifications:

Range: 0.14mm²~ 4mm²

AWG: 26-12

Weight: 0.85kg

Length: 220mm

Material: carbon steel

Application: HDD/HEE, Han D, Han E, Han C

With locator set for Han C® Han D® and Han E®

■ Heavy Duty Connector Crimping Tools AN-0540HX



Specifications:

Range: 0.5mm²~ 6mm²

AWG: 20-12

Weight: 0.60kg

Length: 230mm

Application: HDD/HEE